



# PINA Flood

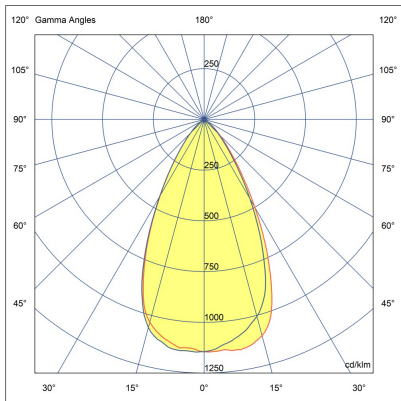

LF8033.003-US-M-927

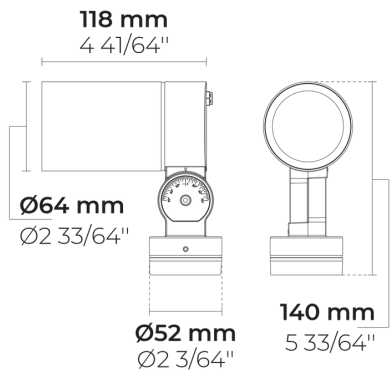

[M]

Medium - NEMA  
Type 4

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [M] 60°       |
| Delivered lumens flux | 368 lm        |
| Rated input power     | 7.5 W         |
| Color temperature     | 2700 K CRI 90 |
| Luminaire efficacy    | 49 lm/W       |
| Lamp                  | 1 LAMP        |
| Color Deviation       | 5 SDCM        |

## Options

## Technical information

|                          |                                                                           |
|--------------------------|---------------------------------------------------------------------------|
| Mounting                 | Pedestal knuckle mount (standard), stake mount (optional)                 |
| Tilt angle               | +90°/-80°                                                                 |
| Housing                  | Corrosion resistant, marine grade aluminum housing                        |
| Finishing                | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners                | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| Gasket                   | Silicone                                                                  |
| Glass / Diffusor         | Tempered safety glass                                                     |
| Impact protection        | IK06                                                                      |
| Ingress protection       | IP65                                                                      |
| Input voltage            | 120-277V 50/60Hz                                                          |
| Insulation class         | Class I                                                                   |
| Wind catching area (EPA) | 0.11 ft²                                                                  |
| Weight                   | 0.9 lbs                                                                   |
| Driver                   | Internal LED driver                                                       |
| Power factor             | > 0.93                                                                    |
| Through wiring           | Single power cord entry                                                   |
| Power cord               | 16" of flexible power cord                                                |
| Notes                    | Louver Snap Lens can not be combined with other lenses.                   |

## Accessories (To be ordered separately)

---

### Mounting accessories



**Spike**

160405040

|                           |  |      |  |  |      |  |          |  |
|---------------------------|--|------|--|--|------|--|----------|--|
| Project name              |  |      |  |  | Type |  | Quantity |  |
| Date                      |  | Note |  |  |      |  |          |  |
| LF8033.003-US-M-927-__-__ |  |      |  |  |      |  |          |  |

| Light distribution                               | Rated input power   | Color temperature             | Control                      | Product colors                                                                                                                            |
|--------------------------------------------------|---------------------|-------------------------------|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[M]</b><br>Medium - NEMA Type 4 - 60°         | <b>[I]</b><br>7.5 W | <b>[927]</b><br>2700 K CRI 90 | <b>[ONOFF]</b><br>On/Off     | <b>[HM1]</b> <br>Black                                 |
| <b>[VN]</b><br>Very narrow - NEMA Type 1 - 10°   |                     | <b>[930]</b><br>3000 K CRI 90 | <b>[PD]</b><br>Phase dimming | <b>[HM2]</b> <br>Dark gray                             |
| <b>[N]</b><br>Narrow - NEMA Type 2 - 25°         |                     | <b>[940]</b><br>4000 K CRI 90 |                              | <b>[HM3]</b> <br>Anthracite gray                       |
| <b>[MN]</b><br>Medium narrow - NEMA Type 3 - 36° |                     |                               |                              | <b>[HM4]</b> <br>Light gray                            |
|                                                  |                     |                               |                              | <b>[HM5]</b> <br>White                                 |
|                                                  |                     |                               |                              | <b>[HM6]</b> <br>Bronze                                |
|                                                  |                     |                               |                              | <b>[CC]</b> <br>Custom color (Please specify RAL code) |
| <b>Accessories (To be ordered separately)</b>    |                     |                               |                              |                                                                                                                                           |
| <b>Mounting accessories</b>                      |                     |                               |                              |                                                                                                                                           |
| <b>[160405040]</b><br>Spike                      |                     |                               |                              |                                                                                                                                           |