



PINA W

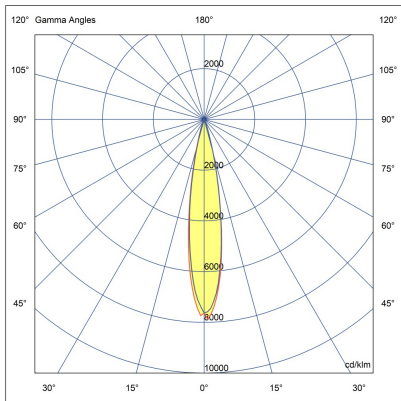

LW8034.003-US-VN-927

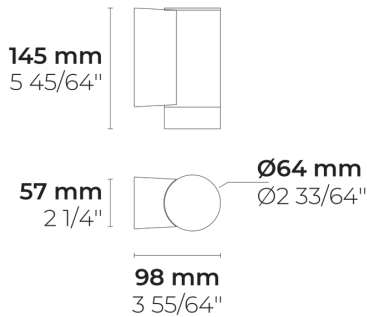

[VN]

Very narrow - NEMA
Type I

Configuration

Light distribution	[VN] 10°
Delivered lumens flux	368 lm
Rated input power	7.5 W
Color temperature	2700 K CRI 90
Luminaire efficacy	49 lm/W
Lamp	1 LAMP
Color Deviation	5 SDCM

Options

Technical information

Mounting	Wall mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffuser	Tempered safety glass
Impact protection	IK06
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	1.5 lbs
Driver	Internal LED driver
Power factor	> 0.93
Through wiring	Single power cord entry
Power cord	8" of flexible power cord
Packing box dimensions	4 21/64" * 7 3/32" * 2 3/4"
Notes	Louver Snap Lens can not be combined with other lenses.

Project name				Type		Quantity	
Date		Note					
LW8034.003-US-VN-927-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[VN] Very narrow - NEMA Type 1 - 10°	[I] 7.5 W	[927] 2700 K CRI 90	[ONOFF] On/Off	[HM1] Black
[N] Narrow - NEMA Type 2 - 25°		[930] 3000 K CRI 90	[PD] Phase dimming	[HM2] Dark gray
[MN] Medium narrow - NEMA Type 3 - 36°		[940] 4000 K CRI 90		[HM3] Anthracite gray
[M] Medium - NEMA Type 4 - 60°				[HM4] Light gray
				[HM5] White
				[HM6] Bronze
				[CC] Custom color (Please specify RAL code)