

REGIO A 6 Module


CE UK CA IK08 IP66



LF8032.536-EN-SLFB-700-830-EN-C1



PHASED-
OUT

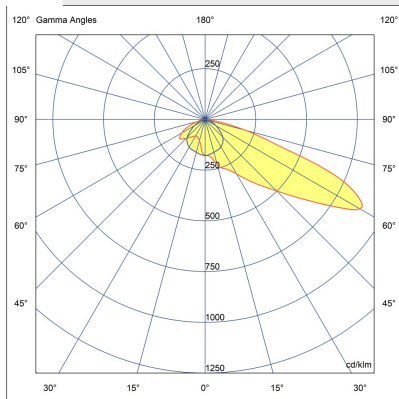

[SLFB]

Special linear,
Forward throw

Variant

Light distribution	[SLFB] 106x28°
Delivered lumens flux	74058 lm
Rated input power	945 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	78 lm/W
Lamp	108 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000

Options

Technical information

Mounting	Surface mountable via a bracket
Tilt angle	+45°/-45°
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.12 m ²
Weight	58.91 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Driver surge protection	10/8 kV
Power factor	> 0.99
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	1 m of flexible cable
Notes	Please contact the sales department regarding this product's availability.

Project name		Type		Quantity	
Date		Note			
LF8032.536-EN-SLFB-700-830-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLFB] Special linear, Forward throw - 106x28°	[700] 945 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM3]  Anthracite grey
		[827] 2700 K CRI 80	[DALI] DALI	[HM4]  Light grey
		[740] 4000 K CRI 70		[CC]  Custom colour (Please specify RAL code)
		[840] 4000 K CRI 80		
Extras				
Consult the factory				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				