


# REGIO A 4 Module



LF8032.534-US-SLFB-700-840

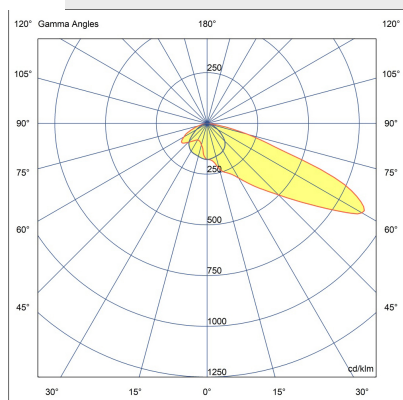

**[SLFB]**  
Special linear,  
Forward throw

## Configuration




<b>Light distribution</b>	[SLFB] 106x28°
<b>Delivered lumens flux</b>	55393 lm
<b>Rated input power</b>	630 W
<b>Color temperature</b>	4000 K CRI 80
<b>Luminaire efficacy</b>	87 lm/W
<b>Lamp</b>	72 LED
<b>Color Deviation</b>	5 SDCM
<b>Lifetime L90 (hour)</b>	>60,000
<b>Lifetime L80 (hour)</b>	>60,000

## Options

## Technical information

<b>Mounting</b>	Yoke mount
<b>Tilt angle</b>	+45°/-45°
<b>Housing</b>	Corrosion resistant, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone rubber
<b>Lens / Reflector</b>	PMMA lens with high optical efficiency
<b>Glass / Diffuser</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	120-277V 50/60Hz
<b>Insulation class</b>	Class I
<b>Wind catching area (EPA)</b>	0.11 m <sup>2</sup>
<b>Weight</b>	97.46 lbs
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	External LED driver
<b>Driver surge protection</b>	10/10 kV
<b>Power factor</b>	> 0.99
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	40" of flexible power cord
<b>Notes</b>	Please contact the sales department regarding this product's availability.

Project name				Type		Quantity	
Date		Note					
LF8032.534-US-SLFB-700-840-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SLFB]</b> Special linear, Forward throw - 106x28°	<b>[700]</b> 630 W	<b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM3]</b>  Anthracite gray
		<b>[827]</b> 2700 K CRI 80	<b>[0-10V]</b> 0-10V	<b>[HM4]</b>  Light gray
		<b>[830]</b> 3000 K CRI 80		<b>[CC]</b>  Custom color (Please specify RAL code)
		<b>[740]</b> 4000 K CRI 70		
Extras				
Luminaire body options				
<b>[DPC]</b> Double powder coating				