


# PUNTO S



LF8017.693-US-N-700-730

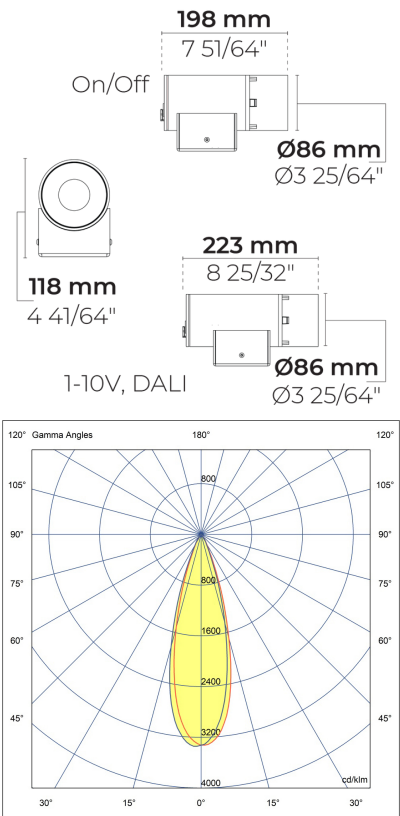

[N]

Narrow - NEMA Type 2

## Configuration

Light distribution	[N] 26°
Delivered lumens flux	974 lm
Rated input power	10 W
Color temperature	3000 K CRI 70
Luminaire efficacy	97 lm/W
Lamp	1 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000

## Options

## Technical information

Mounting	Yoke mount (standard), stake mount (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	High reflectance aluminium coating [S] [N], PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.23 ft <sup>2</sup>
Weight	3.3 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single power cord entry
Operating temperature	-30...50°C
Power cord	16" of flexible power cord

Accessories (To be ordered separately)

---

Optical accessories



**Visor for PUNTO S**

007502282

Mounting accessories



**Spike**

160405040

Project name				Type		Quantity	
Date		Note					

**LF8017.693-US-N-700-730-\_\_-\_\_-\_\_**

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[N]</b> Narrow - NEMA Type 2 - 26°	<b>[700]</b> 10 W	<b>[730]</b> 3000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[HM1]</b> Black
<b>[S]</b> Spot - NEMA Type 0 - 7°		<b>[827]</b> 2700 K CRI 80	<b>[0-10V]</b> 0-10V	<b>[HM2]</b> Dark gray
<b>[MN]</b> Medium narrow - NEMA Type 3 - 42°		<b>[830]</b> 3000 K CRI 80		<b>[HM3]</b> Anthracite gray
<b>[M]</b> Medium - NEMA Type 4 - 60°		<b>[740]</b> 4000 K CRI 70		<b>[HM4]</b> Light gray
		<b>[840]</b> 4000 K CRI 80		<b>[HM5]</b> White
				<b>[HM6]</b> Bronze
				<b>[CC]</b> Custom color (Please specify RAL code)
Extras	Accessories ( <i>To be ordered separately</i> )			
Luminaire body options	Optical accessories			
[DPC] Double powder coating	[007502282] Visor for PUNTO S			
	Mounting accessories			
	[160405040] Spike			