


LB6060.548-EN-ASYM-350-830-ONOFF-EN-C1

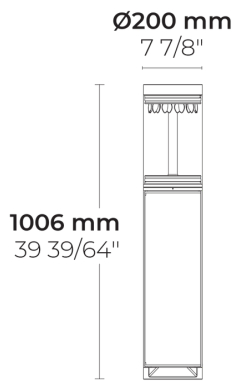

[ASYM]  
Asymmetric

## Variant

Light distribution	[ASYM] 102x45°
Delivered lumens flux	1064 lm
Rated input power	15 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	70 lm/W
Lamp	6 LED
MacAdam Ellipse	3 SDCM
BUG rating	B2-U0-G1
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000

## Options

Control	ONOFF
---------	-------


## Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	11.8 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

## Accessories (To be ordered separately)

---








### Anchorage



**630J014**

630J014

Project name		Type		Quantity	
Date		Note			
LB6060.548-EN-ASYM-350-830-ONOFF-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[ASYM]</b> Asymmetric - 102x45°	<b>[350]</b> 15 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black <b>[HM2]</b>  Dark grey <b>[HM3]</b>  Anthracite grey <b>[HM4]</b>  Light grey <b>[HM5]</b>  White <b>[HM6]</b>  Bronze <b>[CC]</b>  Custom colour (Please specify RAL code)
		<b>[827]</b> 2700 K CRI 80 <b>[740]</b> 4000 K CRI 70 <b>[840]</b> 4000 K CRI 80		
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
<b>[H1]</b> 1m  <b>[HC]</b>	<b>Consult the factory</b>	<b>Anchorage</b>		
	<b>[UNI]</b> 120-277V 50/60Hz	<b>[630J014]</b> 630J014		
	<b>Luminaire body options</b>			
	<b>[DPC]</b> Double powder coating			