
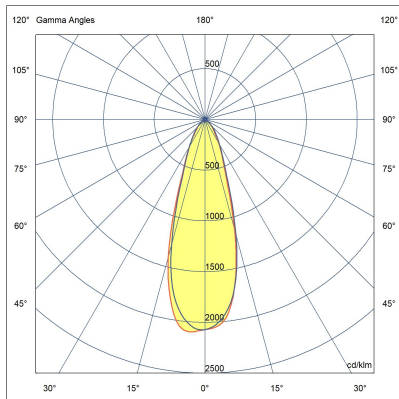
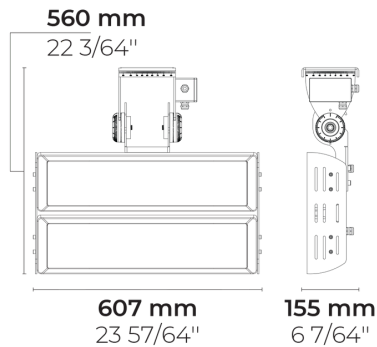


# REGIO V2 IN 2 Module

CE UK CA IK08 IP66 



LF8039.521-EN-MN-2170-740-DALI-EN-C1



[MN]

Medium narrow

## Variant

<b>Light distribution</b>	[MN] 30°
<b>Delivered lumens flux</b>	116867 lm
<b>Rated input power</b>	780 W
<b>Colour temperature</b>	4000 K CRI 70
<b>Luminaire efficacy</b>	150 lm/W
<b>Lamp</b>	336 LED
<b>MacAdam Ellipse</b>	5 SDCM
<b>Lifetime L90B50 (hour)</b>	>52,000
<b>Lifetime L80B50 (hour)</b>	>52,000

## Options

## Technical information

<b>Mounting</b>	Direct tray mountable
<b>Tilt angle</b>	90°
<b>Rotation angle</b>	±63°
<b>Housing</b>	Corrosion resistant, die-cast, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	19.0 kg
<b>Driver</b>	External LED driver
<b>Driver surge protection</b>	10/6 kV
<b>Power factor</b>	> 0.99
<b>Through wiring</b>	Single cable entry
<b>Operating temperature</b>	-40...50°C
<b>Cable</b>	1 m of flexible cable

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com


HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 27.06.2024. For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---




### Optical accessories



#### Visor for REGIO V2 2 Module

100139031

Project name		Type		Quantity	
Date		Note			
<b>LF8039.521-EN-MN-2170-740-DALI-EN-C1-__-__</b>					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[MN]</b> Medium narrow - 30°	<b>[2170]</b> 780 W	<b>[740]</b> 4000 K CRI 70	<b>[DALI]</b> DALI	<b>[HM3]</b>  Anthracite grey
<b>[EL-2]</b> Elliptical - 35x85°		<b>[827]</b> 2700 K CRI 80 <b>[830]</b> 3000 K CRI 80 <b>[840]</b> 4000 K CRI 80 <b>[957]</b> 5700 K CRI 90		<b>[HM4]</b>  Light grey <b>[CC]</b>  Custom colour (Please specify RAL code)
<b>Extras</b>	<b>Accessories (To be ordered separately)</b>			
<b>Consult the factory</b>	<b>Optical accessories</b>			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[100139031]</b> Visor for REGIO V2 2 Module			