



# REGIO V2 IN 2 Module

CE UK CA IK08 IP66

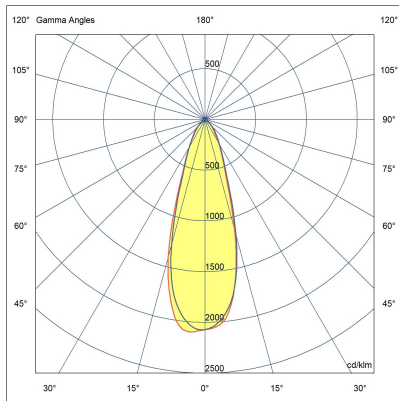

LF8039.521-EN-MN-2170-740-DALI-EN-C1

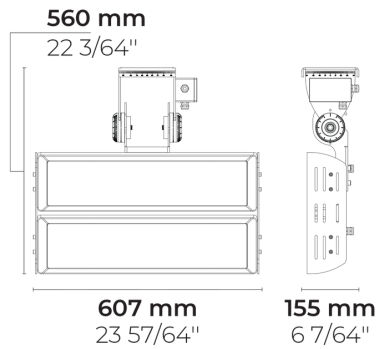

[MN]

Medium narrow

## Variant

Light distribution	[MN] 30°
Delivered lumens flux	116867 lm
Rated input power	780 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	150 lm/W
Lamp	336 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>52,000
Lifetime L80B50 (hour)	>52,000

## Options

## Technical information

Mounting	Direct tray mountable
Tilt angle	90°
Rotation angle	±63°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	19.0 kg
Driver	External LED driver
Driver surge protection	10/6 kV
Power factor	> 0.99
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	1 m of flexible cable

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com


HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 27.06.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---




### Optical accessories



### Visor for REGIO V2 2 Module

100139031

<b>Project name</b>		<b>Type</b>		<b>Quantity</b>	
<b>Date</b>		<b>Note</b>			
<b>LF8039.521-EN-MN-2170-740-DALI-EN-C1-__-__</b>					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[MN]</b> Medium narrow - 30°	<b>[2170]</b> 780 W	<b>[740]</b> 4000 K CRI 70	<b>[DALI]</b> DALI	<b>[HM3]</b>  Anthracite grey
<b>[EL-2]</b> Elliptical - 35x85°		<b>[827]</b> 2700 K CRI 80 <b>[830]</b> 3000 K CRI 80 <b>[840]</b> 4000 K CRI 80 <b>[957]</b> 5700 K CRI 90		<b>[HM4]</b>  Light grey <b>[CC]</b>  Custom colour (Please specify RAL code)
<b>Extras</b>	<b>Accessories (To be ordered separately)</b>			
<b>Consult the factory</b>	<b>Optical accessories</b>			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[100139031]</b> Visor for REGIO V2 2 Module			