



# REGIO V2 IN 2 Module

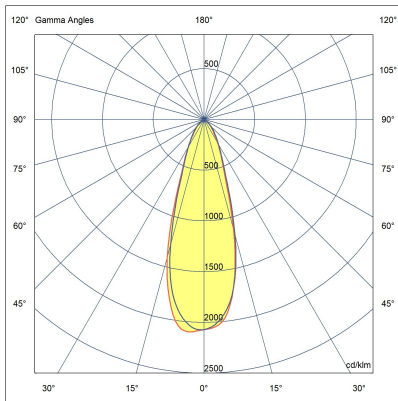

LF8039.521-EN-MN-2170-740-DALI

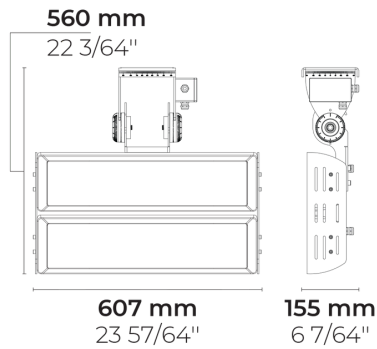

[MN]

Medium narrow -  
NEMA Type 3

## Configuration

<b>Light distribution</b>	[MN] 30°
<b>Delivered lumens flux</b>	116867 lm
<b>Rated input power</b>	780 W
<b>Color temperature</b>	4000 K CRI 70
<b>Luminaire efficacy</b>	150 lm/W
<b>Lamp</b>	336 LED
<b>Color Deviation</b>	5 SDCM
<b>Lifetime L90 (hour)</b>	>52,000
<b>Lifetime L80 (hour)</b>	>52,000

## Options


## Technical information

<b>Mounting</b>	Direct tray mountable
<b>Tilt angle</b>	90°
<b>Rotation angle</b>	±63°
<b>Housing</b>	Corrosion resistant, die-cast, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	19.0 kg
<b>Driver</b>	External LED driver
<b>Driver surge protection</b>	10/6 kV
<b>Power factor</b>	> 0.99
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	40" of flexible power cord

## Accessories (To be ordered separately)

---




### Optical accessories



### Visor for REGIO V2 2 Module

100139031

<b>Project name</b>		<b>Type</b>		<b>Quantity</b>	
<b>Date</b>		<b>Note</b>			
<b>LF8039.521-EN-MN-2170-740-DALI-__-__</b>					

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[MN]</b> Medium narrow - NEMA Type 3 - 30°	<b>[2170]</b> 780 W	<b>[740]</b> 4000 K CRI 70	<b>[DALI]</b> DALI	<b>[HM3]</b>  Anthracite gray
<b>[EL-2]</b> Elliptical - 35x85°		<b>[827]</b> 2700 K CRI 80 <b>[830]</b> 3000 K CRI 80 <b>[840]</b> 4000 K CRI 80 <b>[957]</b> 5700 K CRI 90		<b>[HM4]</b>  Light gray <b>[CC]</b>  Custom color (Please specify RAL code)
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Consult the factory</b>	<b>Optical accessories</b>			
<b>[UNI]</b> 120-277V 50/60Hz	<b>[100139031]</b> Visor for REGIO V2 2 Module			