



REGIO V2 R HP 3 Module

CE UK CA IK08 IP66

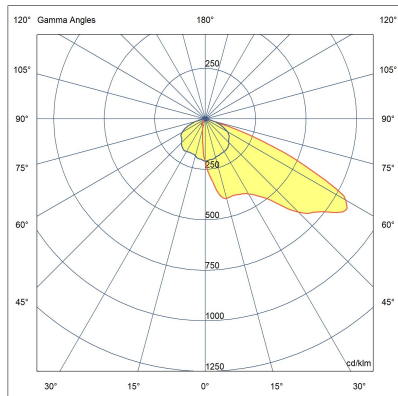

LF8038.563-EN-SLFB-1700-840-EN-C1

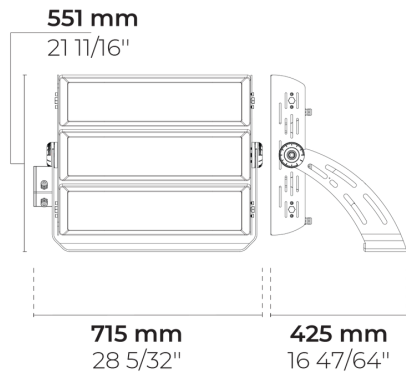

[EL]
Elliptical

Variant

Light distribution	[EL] 20x30°
Delivered lumens flux	64997 lm
Rated input power	580 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	112 lm/W
Lamp	252 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>52,000
Lifetime L80B50 (hour)	>52,000


Options

Technical information

Mounting	Surface mountable via a bracket
Tilt angle	+110°/-180°
Rotation angle	±6.5°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	28.8 kg
Driver	External LED driver
Driver surge protection	10/6 kV
Power factor	> 0.99
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	1 m of flexible cable

Accessories (To be ordered separately)

Optical accessories



Visor for REGIO V2 3 Module

100139032

Project name		Type		Quantity	
Date		Note			
LF8038.563-EN-SLFB-1700-840-__-EN-C1-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[EL] Elliptical - 20x30°	[4280] 580 W	[830] 3000 K CRI 80		[HM3] Anthracite grey 
[EL-2] Elliptical - 35x85°	[2170] 780 W [1453] 1480 W [1837] 1780 W	[827] 2700 K CRI 80		[HM4] Light grey  [CC]  Custom colour (Please specify RAL code)
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Optical accessories			
[UNI] 120-277V 50/60Hz	[100139032] Visor for REGIO V2 3 Module			