


GOLEDO-IN 64 LED



LW2037.767-US-N-350-830

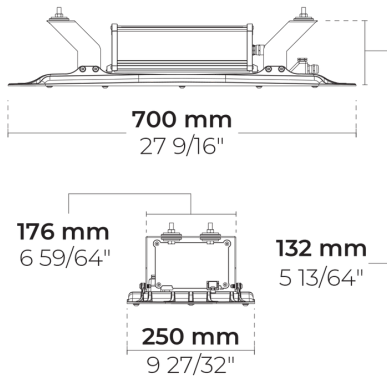

[N]

Narrow - NEMA Type 2

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [N] 25° |
| Delivered lumens flux | 15404 lm |
| Rated input power | 136 W |
| Color temperature | 3000 K CRI 80 |
| Luminaire efficacy | 113 lm/W |
| Lamp | 64 LED |
| Color Deviation | 3 SDCM |
| BUG rating | B5-U0-G1 |
| Lifetime L90 (hour) | >102,000 |
| Lifetime L80 (hour) | >102,000 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Standard strap connection. Sliding mounting bracket is optional through extra |
| Housing | Corrosion resistant, die-cast, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | PMMA lens with high optical efficiency |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP66 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 20.7 lbs |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 6/4 kV |
| Power factor | > 0.98 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 40" of halogen-free power cord |

| | | | | | | | |
|-------------------------------------|--|------|--|------|--|----------|--|
| Project name | | | | Type | | Quantity | |
| Date | | Note | | | | | |
| LW2037.767-US-N-350-830-__-__-__-__ | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|--|-----------------------|-------------------------------|--------------------------|---|
| [N] Narrow - NEMA Type 2 - 25° | [700] 136 W | [830] 3000 K CRI 80 | [ONOFF] On/Off | [CC] Custom color (Please specify RAL code) |
| [M] Medium - NEMA Type 4 - 50° | [500] 94 W | [840] 4000 K CRI 80 | [0-10V] 0-10V | [7035] Light gray (RAL 7035) |
| Extras | | | | |
| External surge protection | | | | |
| [SP10] 10 kV | | | | |
| Luminaire body options | | | | |
| [DPC] Double powder coating | | | | |