



# GOLEDO-IN 64 LED



LW2037.767-US-N-350-840



PHASED-  
OUT

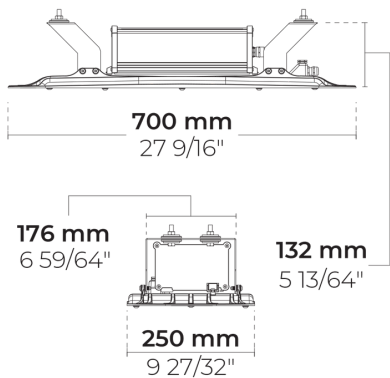

[N]  
Narrow - NEMA Type  
2

## Configuration



Light distribution	[N] 25°
Delivered lumens flux	15404 lm
Rated input power	136 W
Color temperature	4000 K CRI 80
Luminaire efficacy	113 lm/W
Lamp	64 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

## Options

## Technical information

Mounting	Standard strap connection. Sliding mounting bracket is optional through extra
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	20.7 lbs
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	6/4 kV
Power factor	> 0.98
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	40" of halogen-free power cord

Project name				Type		Quantity	
Date		Note					
LW2037.767-US-N-350-840-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[N]</b> Narrow - NEMA Type 2 - 25°	<b>[700]</b> 136 W	<b>[840]</b> 4000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[CC]</b>  Custom color (Please specify RAL code)
<b>[M]</b> Medium - NEMA Type 4 - 50°	<b>[500]</b> 94 W	<b>[830]</b> 3000 K CRI 80	<b>[0-10V]</b> 0-10V	<b>[7035]</b>  Light gray (RAL 7035)
<b>Extras</b>				
<b>External surge protection</b>				
<b>[SP10]</b> 10 kV				
<b>Luminaire body options</b>				
<b>[DPC]</b> Double powder coating				