

GOLEDO-IN 128 LED




IK08 IP66



LW2037.888-EN-M-350-840-EN-C1



PHASED-
OUT

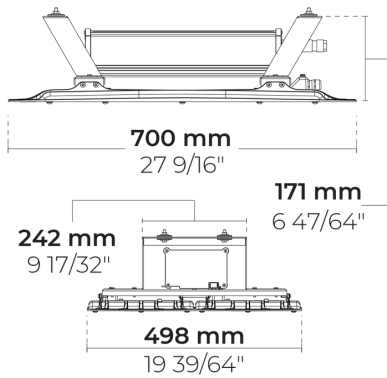



Options

Technical information

| | |
|--------------------------------|---|
| Mounting | Standard strap connection. Sliding mounting bracket is optional through extra |
| Housing | Corrosion resistant, die-cast, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | PMMA lens with high optical efficiency |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP66 |
| Input voltage | 220-240V 50/60Hz |
| Insulation class | Class I |
| Weight | 18.75 kg |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 10/6 kV |
| Power factor | > 0.95 |
| Through wiring | Single cable entry |
| Operating temperature | -40...50°C |
| Cable | 1 m of halogen-free cable |
| Notes | This product can be supplied with Insulation class (Class II) upon request. Please contact factory. |

| | | | | | |
|---|--|------|--|----------|--|
| Project name | | Type | | Quantity | |
| Date | | Note | | | |
| LW2037.888-EN-M-350-840-__-EN-C1-__-__-__-__-__ | | | | | |

| Light distribution | Rated input power | Colour temperature | Control | Product colours |
|--|--|--|--|--|
| [] [N] Narrow - 25° [M] Medium - 50° | [500] 188 W [700] 272 W | [830] 3000 K CRI 80 [840] 4000 K CRI 80 | [ONOFF] On/Off [0-10V] 0-10V [DALI] DALI [AUTO] AutoDIM [STEP] StepDIM | [CC]  Custom colour (Please specify RAL code) [7035]  Light grey (RAL 7035) |
| Extras | | | | |
| External surge protection | | | | |
| [SP10] 10 kV | | | | |
| Light output | | | | |
| [CLO] Constant light output | | | | |
| Consult the factory | | | | |
| [C2] Class II | | | | |
| Luminaire body options | | | | |
| [DPC] Double powder coating | | | | |