


# GOLEDO-T 128 LED



LT2037.768-EN-T-ASYM-A-350-740

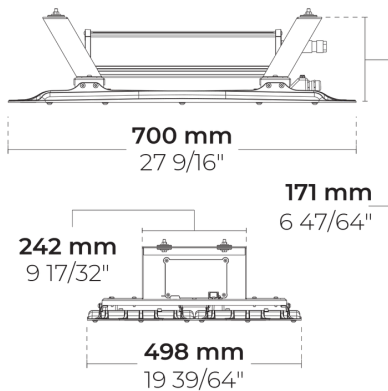

[T-ASYM-A]  
Tunnel, Asymmetric,  
Type A

## Configuration

|                       |               |
|-----------------------|---------------|
| Light distribution    | [T-ASYM-A]    |
| Delivered lumens flux | 22098 lm      |
| Rated input power     | 127 W         |
| Color temperature     | 4000 K CRI 70 |
| Luminaire efficacy    | 173 lm/W      |
| Lamp                  | 128 LED       |
| Color Deviation       | 4 SDCM        |
| Lifetime L90 (hour)   | >102,000      |
| Lifetime L80 (hour)   | >102,000      |

## Options

## Technical information

|                         |                                                                                                     |
|-------------------------|-----------------------------------------------------------------------------------------------------|
| Mounting                | Standard strap connection. Sliding mounting bracket is optional through extra                       |
| Housing                 | Corrosion resistant, die-cast, marine grade aluminum housing                                        |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                           |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                        |
| Gasket                  | Silicone                                                                                            |
| Lens / Reflector        | PMMA lens with high optical efficiency                                                              |
| Glass / Diffusor        | Tempered safety glass                                                                               |
| Impact protection       | IK08                                                                                                |
| Ingress protection      | IP66                                                                                                |
| Input voltage           | 220-240V 50/60Hz                                                                                    |
| Insulation class        | Class I                                                                                             |
| Weight                  | 18.75 kg                                                                                            |
| LED module              | High power LEDs on metal-core PCB                                                                   |
| Driver                  | Internal LED driver                                                                                 |
| Driver surge protection | 10/6 kV                                                                                             |
| Power factor            | > 0.95                                                                                              |
| Through wiring          | Single power cord entry                                                                             |
| Operating temperature   | -40...50°C                                                                                          |
| Power cord              | 40" of halogen-free power cord                                                                      |
| Notes                   | This product can be supplied with Insulation class (Class II) upon request. Please contact factory. |

|              |  |      |  |      |  |          |  |
|--------------|--|------|--|------|--|----------|--|
| Project name |  |      |  | Type |  | Quantity |  |
| Date         |  | Note |  |      |  |          |  |

**LT2037.768-EN-T-ASYM-A-350-740-\_\_-\_\_-\_\_-\_\_-\_\_-\_\_**

| Light distribution                              | Rated input power     | Color temperature             | Control                  | Product colors                                                                                                                            |
|-------------------------------------------------|-----------------------|-------------------------------|--------------------------|-------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[T-ASYM-A]</b><br>Tunnel, Asymmetric, Type A | <b>[350]</b><br>127 W | <b>[740]</b><br>4000 K CRI 70 | <b>[ONOFF]</b><br>On/Off | <b>[CC]</b> <br>Custom color (Please specify RAL code) |
| <b>[T-ASYM-B]</b><br>Tunnel, Asymmetric, Type B | <b>[700]</b><br>274 W | <b>[730]</b><br>3000 K CRI 70 | <b>[0-10V]</b><br>0-10V  | <b>[7035]</b> <br>Light gray (RAL 7035)                |
| <b>[T-ASYM-C]</b><br>Tunnel, Asymmetric, Type C | <b>[700]</b><br>273 W |                               | <b>[DALI]</b><br>DALI    |                                                                                                                                           |
| <b>[T-ASYM-D]</b><br>Tunnel, Asymmetric, Type D | <b>[500]</b><br>187 W |                               | <b>[AUTO]</b><br>AutoDIM |                                                                                                                                           |
| <b>[T-CB-A]</b><br>Tunnel, Counter beam, Type A | <b>[500]</b><br>182 W |                               | <b>[STEP]</b><br>StepDIM |                                                                                                                                           |
| <b>[T-CB-B]</b><br>Tunnel, Counter beam, Type B | <b>[500]</b><br>189 W |                               |                          |                                                                                                                                           |
| <b>[T-CB-B]</b><br>Tunnel, Counter beam, Type B | <b>[500]</b><br>186 W |                               |                          |                                                                                                                                           |
| <b>[T-SYM-A]</b><br>Tunnel, Symmetric, Type A   | <b>[350]</b><br>123 W |                               |                          |                                                                                                                                           |
| <b>[T-SYM-A]</b><br>Tunnel, Symmetric, Type A   | <b>[350]</b><br>128 W |                               |                          |                                                                                                                                           |
| <b>[T-SYM-B]</b><br>Tunnel, Symmetric, Type B   | <b>[350]</b><br>124 W |                               |                          |                                                                                                                                           |
| <b>[T-SYM-B]</b><br>Tunnel, Symmetric, Type B   | <b>[350]</b><br>126 W |                               |                          |                                                                                                                                           |
| <b>[T-SYM-C]</b><br>Tunnel, Symmetric, Type C   | <b>[500]</b><br>184 W |                               |                          |                                                                                                                                           |
| <b>[T-SYM-C]</b><br>Tunnel, Symmetric, Type C   | <b>[500]</b><br>188 W |                               |                          |                                                                                                                                           |
| <b>[T-SYM-D]</b><br>Tunnel, Symmetric, Type D   | <b>[500]</b><br>185 W |                               |                          |                                                                                                                                           |
| <b>[T-SYM-D]</b><br>Tunnel, Symmetric, Type D   | <b>[500]</b><br>63 W  |                               |                          |                                                                                                                                           |
| <b>[T-SYM-D]</b><br>Tunnel, Symmetric, Type D   | <b>[350]</b><br>125 W |                               |                          |                                                                                                                                           |
| <b>Extras</b>                                   |                       |                               |                          |                                                                                                                                           |

|                                       |
|---------------------------------------|
| <b>External surge protection</b>      |
| <b>[SP10]</b><br>10 kV                |
| <b>Light output</b>                   |
| <b>[CLO]</b><br>Constant light output |
| <b>Consult the factory</b>            |
| <b>[C2]</b><br>Class II               |
| <b>[UNI]</b><br>120-277V 50/60Hz      |
| <b>Luminaire body options</b>         |
| <b>[DPC]</b><br>Double powder coating |