


GOLEDO-T 128 LED



LT2037.768-EN-T-CB-A-350-730

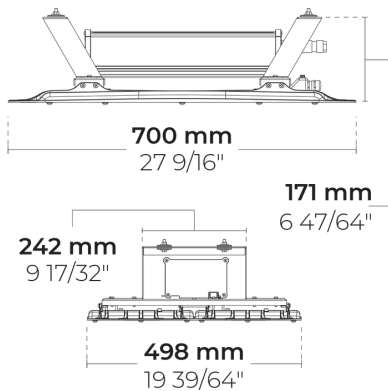

[T-CB-A]

Tunnel, Counter
beam, Type A

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [T-CB-A] |
| Delivered lumens flux | 19653 lm |
| Rated input power | 123 W |
| Color temperature | 3000 K CRI 70 |
| Luminaire efficacy | 159 lm/W |
| Lamp | 128 LED |
| Color Deviation | 3 SDCM |
| Lifetime L90 (hour) | >102,000 |
| Lifetime L80 (hour) | >102,000 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Standard strap connection. Sliding mounting bracket is optional through extra |
| Housing | Corrosion resistant, die-cast, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | PMMA lens with high optical efficiency |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP66 |
| Input voltage | 220-240V 50/60Hz |
| Insulation class | Class I |
| Weight | 18.75 kg |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 10/6 kV |
| Power factor | > 0.95 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 40" of halogen-free power cord |
| Notes | This product can be supplied with Insulation class (Class II) upon request. Please contact factory. |

| | | | | | | | | |
|--|--|--|------|--|------|--|----------|--|
| Project name | | | | | Type | | Quantity | |
| Date | | | Note | | | | | |
| LT2037.768-EN-T-CB-A-350-730-__-__-__-__-__-__ | | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|---|-----------------------|-------------------------------|--------------------------|---|
| [T-CB-A] Tunnel, Counter beam, Type A | [350] 123 W | [730] 3000 K CRI 70 | [ONOFF] On/Off | [CC] Custom color (Please specify RAL code) |
| [T-ASYM-A] Tunnel, Asymmetric, Type A | [700] 274 W | [740] 4000 K CRI 70 | [0-10V] 0-10V | [7035] Light gray (RAL 7035) |
| [T-ASYM-B] Tunnel, Asymmetric, Type B | [700] 273 W | | [DALI] DALI | |
| [T-ASYM-C] Tunnel, Asymmetric, Type C | [500] 187 W | | [AUTO] AutoDIM | |
| [T-ASYM-D] Tunnel, Asymmetric, Type D | [500] 182 W | | [STEP] StepDIM | |
| [T-ASYM-D] Tunnel, Asymmetric, Type D | [500] 189 W | | | |
| [T-CB-B] Tunnel, Counter beam, Type B | [500] 186 W | | | |
| [T-SYM-A] Tunnel, Symmetric, Type A | [350] 127 W | | | |
| [T-SYM-A] Tunnel, Symmetric, Type A | [350] 128 W | | | |
| [T-SYM-B] Tunnel, Symmetric, Type B | [350] 124 W | | | |
| [T-SYM-B] Tunnel, Symmetric, Type B | [350] 126 W | | | |
| [T-SYM-C] Tunnel, Symmetric, Type C | [350] 124 W | | | |
| [T-SYM-C] Tunnel, Symmetric, Type C | [500] 184 W | | | |
| [T-SYM-D] Tunnel, Symmetric, Type D | [500] 188 W | | | |
| [T-SYM-D] Tunnel, Symmetric, Type D | [500] 185 W | | | |
| | [500] 63 W | | | |
| | [350] 125 W | | | |
| Extras | | | | |

| |
|---------------------------------------|
| External surge protection |
| [SP10] 10 kV |
| Light output |
| [CLO] Constant light output |
| Consult the factory |
| [C2] Class II |
| [UNI] 120-277V 50/60Hz |
| Luminaire body options |
| [DPC] Double powder coating |