


DOMINO ML EVO 2 Module



LP4034.682-US-T2-700-740

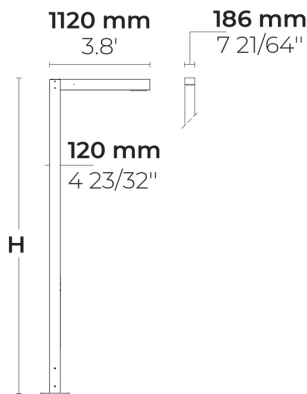

[T2]
Type II

Configuration

| | |
|------------------------|---------------|
| Light distribution | [T2] 130x85° |
| Delivered lumens flux | 6897 lm |
| Rated input power | 70 W |
| Color temperature | 4000 K CRI 70 |
| Luminaire efficacy | 98 lm/W |
| Lamp | 8 LED |
| Color Deviation | 5 SDCM |
| BUG rating | B2-U0-G1 |
| Photobiological safety | Risk group 0 |
| Lifetime L90 (hour) | >60,000 |
| Lifetime L80 (hour) | >60,000 |

Options

Technical information

| | |
|-------------------------|---|
| Housing | Corrosion resistant, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | High reflectance aluminium coating, multifaceted micro reflector |
| Glass / Diffuser | Bio-based, enriched with bisphenol A diffuser |
| Impact protection | IK08 |
| Ingress protection | IP66 |
| Input voltage | 120-277V 50/60Hz |
| Insulation class | Class I |
| Weight | 97.48 lbs (13'), 108.7 lbs (16.5'), 119.92 lbs (20') |
| LED module | Multi-chip high power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 6/6 kV |
| Power factor | > 0.95 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |

Poles (Included)

Product specific poles with base plate



| Configuration code | Height | Diameter / Dimensions | Spigot / End diameter |
|--------------------|--------|--------------------------|--------------------------|
| PAFD.R01.T003-H4 | 13.1' | 7.1x4.7" | |
| PAFD.R01.T003-H5 | 16.4' | 7.1x4.7" | |
| PAFD.R01.T003-H6 | 19.7' | 7.1x4.7" | |

| | | | | | | | |
|--|--|------|--|------|--|----------|--|
| Project name | | | | Type | | Quantity | |
| Date | | Note | | | | | |
| LP4034.682-US-T2-700-740-__-__-__-__-__-__ | | | | | | | |

| Light distribution | Rated input power | Color temperature | Control | Product colors |
|----------------------------------|---------------------------------------|-------------------------------|--------------------------|---|
| [T2] Type II - 130x85° | [700] 70 W | [740] 4000 K CRI 70 | [ONOFF] On/Off | [HM1] Black |
| | | [827] 2700 K CRI 80 | [0-10V] 0-10V | [HM2] Dark gray |
| | | [830] 3000 K CRI 80 | | [HM3] Anthracite gray |
| | | [840] 4000 K CRI 80 | | [HM4] Light gray |
| | | | | [HM5] White |
| | | | | [HM6] Bronze |
| | | | | [CC] Custom color (Please specify RAL code) |
| Height | Extras | | | |
| [H4] 13.1' | Connectivity | | | |
| [H5] 16.4' | [NM7] 7 Pin NEMA socket | | | |
| [H6] 19.7' | Consult the factory | | | |
| [HC] | [MS] Motion sensor | | | |
| | Luminaire body options | | | |
| | [DPC] Double powder coating | | | |