

MOLTO 2 Hybrid

LR9012.690-US-N-700-830-SS





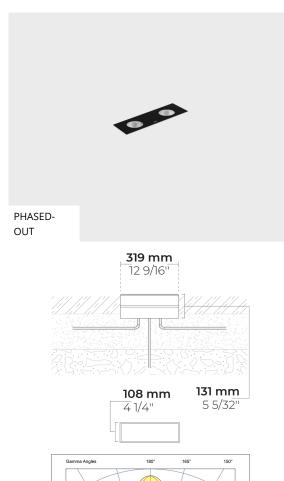



[N] Narrow - NEMA Type 2

Configuration

Light distribution	[N] 26°
Delivered lumens flux	1698 lm
Rated input power	18 W
Color temperature	3000 K CRI 80
Luminaire efficacy	84 lm/W
Lamp	2 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

Options

Technical information


Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI
	316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	5.8 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	External LED driver
Driver surge	2/2 kV
protection	
Power factor	> 0.90
Through wiring	Single power cord entry
Operating	-3050°C
temperature	
Power cord	12" of rubber-sheated power cord

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 28.04.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (Included)

Accessories (To be ordered separately)



007500582

141407400

Mounting accessories



Case removing vacuum

160404012

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 28.04.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project na	me			Туре	Quantity	
Date			Note			
LR9012.	690-US-N	-700-830	SS			

Light distribution	Rated input power	Color temperature	Control	Product colors
[N] Narrow - NEMA Type	[700] 18 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel
2 - 26° [S]		[827] 2700 K CRI 80	[0-10V] 0-10V	
Spot - NEMA Type 0 - 7°		[740] 4000 K CRI 70		
		[840] 4000 K CRI 80		
Accessories (<i>Included</i>)	Accessories (<i>To be</i> ordered separately)			
Mounting accessories	Mounting accessories			
[007500582] Aluminium case for ZETA 4 Dyno / MOLTO 2 Hybrid	[160404012] Case removing vacuum			
[141407400] Connector set - 5-pole				