

MOLTO 2 Hybrid



CE UK CA IK08 IP67



LR9012.690-EN-N-700-830-EN-C1-SS



PHASED-
OUT

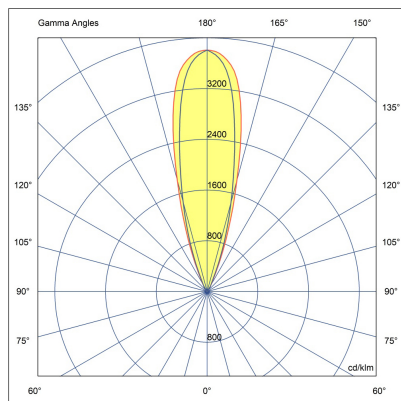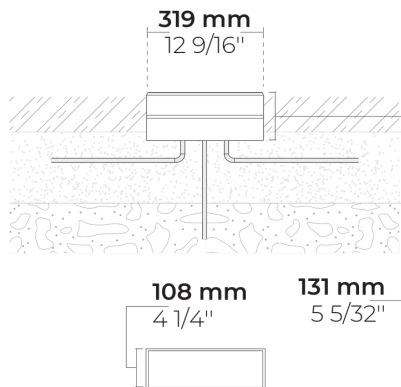

[N]
Narrow

Variant

Light distribution	[N] 26°
Delivered lumens flux	1698 lm
Rated input power	18 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	84 lm/W
Lamp	2 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600


Options

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.66 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-30...50°C
Cable	0.3 m of rubber-sheathed cable

Accessories (Included)

Mounting accessories



**Aluminium case
for ZETA 4 Dyno /
MOLTO 2 Hybrid**

007500582

Accessories (To be ordered separately)


Mounting accessories



**Case removing
vacuum**

160404012


Mounting accessories



**Connector set - 5-
pole**

141407400


Mounting accessories



Junction Box

141901135

Project name		Type		Quantity	
Date		Note			
LR9012.690-EN-N-700-830-__-EN-C1-SS					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[N] Narrow - 26°	[700] 18 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel 
[S] Spot - 7°		[827] 2700 K CRI 80 [740] 4000 K CRI 70 [840] 4000 K CRI 80	[DALI] DALI	
Accessories <i>(Included)</i>	Accessories (To be ordered separately)			
Mounting accessories	Mounting accessories			
[007500582] Aluminium case for ZETA 4 Dyno / MOLTO 2 Hybrid	[160404012] Case removing vacuum [141407400] Connector set - 5-pole [141901135] Junction Box			