



REGIO 2 Module

CE UK CA IK08 IP66

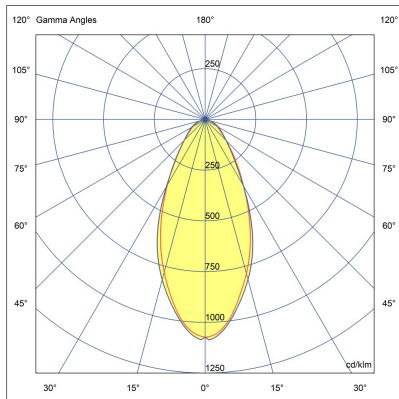

LF8035.522-EN-MN-700-957-EN-C1

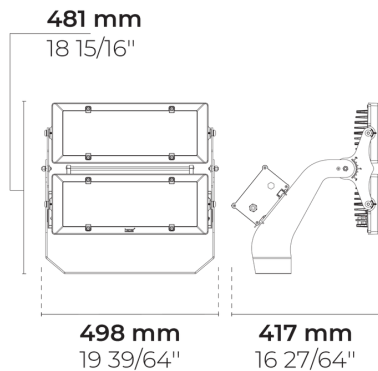

[MN]

Medium narrow

Variant

Light distribution	[MN] 30°
Delivered lumens flux	51151 lm
Rated input power	459 W
Colour temperature	5700 K CRI 90
Luminaire efficacy	111 lm/W
Lamp	216 LED
MacAdam Ellipse	4 SDCM
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

Options

Technical information

Mounting	Surface mountable via a bracket
Tilt angle	+45°/-45°
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone rubber
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Wind catching area (EPA)	0.14 m ²
Weight	19.14 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/10 kV
Power factor	> 0.99
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	1 m of flexible cable

HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 28.04.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name		Type		Quantity	
Date		Note			
LF8035.522-EN-MN-700-957-__-EN-C1-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[MN] Medium narrow - 30°	[700] 459 W	[957] 5700 K CRI 90	[ONOFF] On/Off	[HM3] Anthracite grey 
[I] - 26°	[700] 460 W	[827] 2700 K CRI 80	[DALI] DALI	[HM4] Light grey 
[EL] Elliptical - 15x40°		[830] 3000 K CRI 80		[CC]  Custom colour (Please specify RAL code)
[N] Narrow - 22°		[740] 4000 K CRI 70		
[M] Medium - 50°		[840] 4000 K CRI 80		
[W] Wide - 111°				
Extras				
Consult the factory				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				