

# MOLTO 2 Hybrid



IK08 IP67



LR9012.690-US-S-700-830-UNI-C1-SS



PHASED-  
OUT

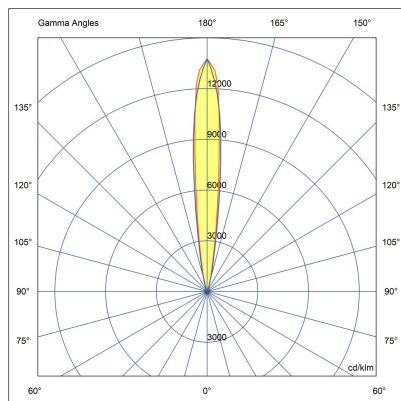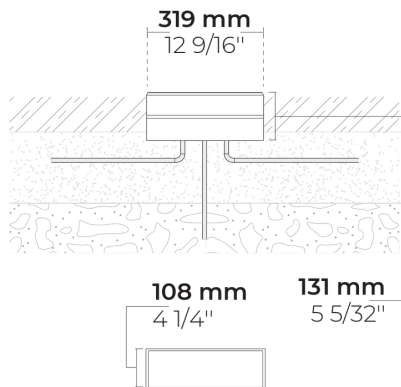

[S]  
Spot

## Variant

Light distribution	[S] 7°
Delivered lumens flux	1888 lm
Rated input power	18 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	104 lm/W
Lamp	2 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

## Options

## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	5.8 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	External LED driver
Driver surge protection	2/2 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-30...50°C
Cable	0.3 m of rubber-sheathed cable

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com


HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 09.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (Included)

## Accessories (To be ordered separately)


### Mounting accessories



**Aluminium case  
for ZETA 4 Dyno /  
MOLTO 2 Hybrid**

007500582

### Mounting accessories



**Connector set - 5-  
pole**

141407400


### Mounting accessories



**Case removing  
vacuum**

160404012

Project name		Type		Quantity	
Date		Note			
LR9012.690-US-S-700-830-__-UNI-C1-SS					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[S]</b> Spot - 7°	<b>[700]</b> 18 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[SS]</b> Stainless steel 
<b>[N]</b> Narrow - 26°		<b>[827]</b> 2700 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80	<b>[0-10V]</b> 0-10V	
<b>Accessories</b> <b>(Included)</b>	<b>Accessories (To be ordered separately)</b>			
<b>Mounting accessories</b>	<b>Mounting accessories</b>			
<b>[007500582]</b> Aluminium case for ZETA 4 Dyno / MOLTO 2 Hybrid  <b>[141407400]</b> Connector set - 5-pole	<b>[160404012]</b> Case removing vacuum			