
MOLTO 4 Hybrid

IK08 IP67



LR9012.695-US-N-700-740-UNI-C1-SS



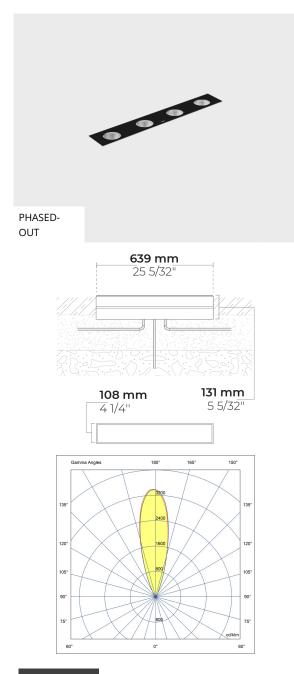

[N] Narrow

Variant

Light distribution	[N] 26°
Delivered lumens flux	4076 lm
Rated input power	35 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	101 lm/W
Lamp	4 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

Options

Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI
	316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	11.8 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	4/4 kV
protection	
Power factor	> 0.97
Through wiring	Single cable entry
Operating	-4050°C
temperature	
Cable	0.3 m of rubber-sheated cable

HPR Pazarlama A.Ş.


Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 04.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (Included)

Accessories (To be ordered separately)



007500618

141407400

Mounting accessories



Case removing vacuum

160404012

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 04.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me				Туре	Quantity	
Date			Note				
LR9012.	695-US-N	-700-740	UNI-(C1-SS			

Light distribution	Rated input power	Colour temperature	Control	Product colours
[N] Narrow - 26°	[700] 35 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[SS] Stainless steel
[S] Spot - 7°		[827] 2700 K CRI 80	[0-10V] 0-10V	
		[830] 3000 K CRI 80		
		[840] 4000 K CRI 80		
Accessories (<i>Included</i>)	Accessories (<i>To be</i> ordered separately)			
Mounting accessories	Mounting accessories			
[007500618] Aluminium case for ZETA 8 Dyno / MOLTO 4 Hybrid	[160404012] Case removing vacuum			
[141407400] Connector set - 5-pole				

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 04.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.