




# MOLTO 6 Hybrid



LR9012.697-EN-N-700-740-ONOFF-SS

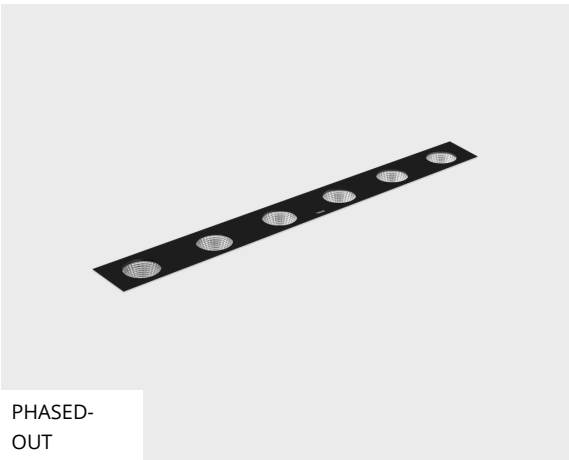

PHASED-  
OUT

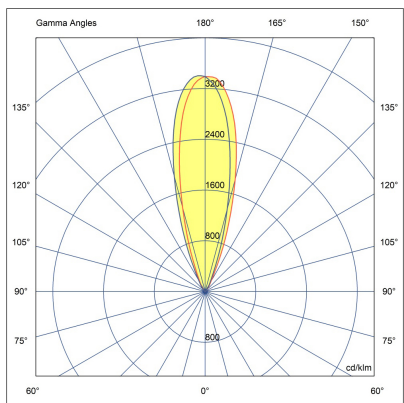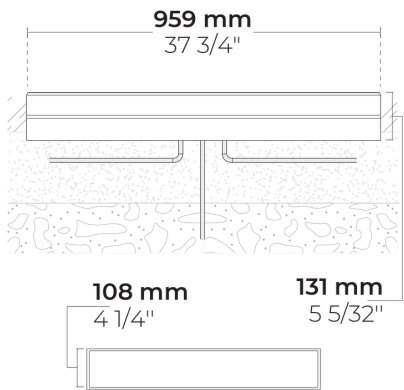

[N]

Narrow - NEMA Type  
2

## Configuration

Light distribution	[N] 26°
Delivered lumens flux	6052 lm
Rated input power	50 W
Color temperature	4000 K CRI 70
Luminaire efficacy	121 lm/W
Lamp	6 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

## Options

## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffuser	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	7.75 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	External LED driver
Driver surge protection	4/4 kV
Power factor	> 0.97
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	12" of rubber-sheathed power cord

Accessories (Included)

Mounting accessories



Aluminium case  
for ZETA 12 Dyno /  
MOLTO 6 Hybrid  
007500402


Accessories (To be ordered separately)

Mounting accessories




Case removing  
vacuum  
160404012

Mounting accessories




Connector set - 5-  
pole  
141407400

Mounting accessories



Junction Box  
141901135

Project name				Type		Quantity	
Date		Note					
LR9012.697-EN-N-700-740-ONOFF-SS-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[N]</b> Narrow - NEMA Type 2 - 26°	<b>[700]</b> 50 W	<b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[SS]</b> Stainless steel 
<b>[S]</b> Spot - NEMA Type 0 - 7°		<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[840]</b> 4000 K CRI 80		
Extras	Accessories <i>(Included)</i>	Accessories <i>(To be ordered separately)</i>		
Consult the factory	Mounting accessories	Mounting accessories		
<b>[UNI]</b> 120-277V 50/60Hz	<b>[007500402]</b> Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid	<b>[160404012]</b> Case removing vacuum  <b>[141407400]</b> Connector set - 5-pole  <b>[141901135]</b> Junction Box		