
СЕ ЦКА ІКОВ ІР67 🔔

Variant



[S] 7°

LR9012.697-EN-S-700-830-ONOFF-EN-C1-SS

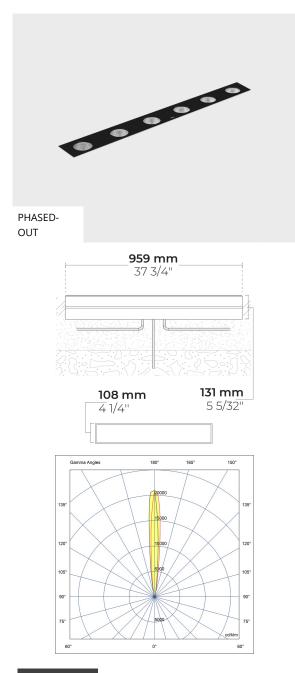

[S] Spot

Light distribution

0	
Delivered lumens flux	5352 lm
Rated input power	50 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	107 lm/W
Lamp	6 LED
MacAdam Ellipse	5 SDCM
Lifetime L90B50 (hour)	>72,600
Lifetime L80B50 (hour)	>72,600

Options

Technical information

Mounting Housing	Ground recessed mountable Corrosion resistant stainless steel housing (AISI 316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	7.75 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	External LED driver
Driver surge	4/4 kV
protection	
Power factor	> 0.97
Through wiring	Single cable entry
Operating	-4050°C
temperature	
Cable	0.3 m of rubber-sheated cable

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 02.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (Included)

Accessories (To be ordered separately)

Mounting accessories



Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid

007500402

Mounting accessories Mounting

Mounting accessories Mounting accessories





Case removing Connector set - 5pole 160404012 141407400



Junction Box 141901135

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 02.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project na	me				Туре	(Quantity	
Date			Note					
LR9012.	697-EN-S	-700-830-	ONOFF-E	C1-SS				

Light distribution	Rated input power	Colour temperature	Control	Product colours
[S] Spot - 7°	[700] 50 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[SS] Stainless steel
[N] Narrow - 26°		[827] 2700 K CRI 80		
		[740] 4000 K CRI 70		
		[840] 4000 K CRI 80		
Extras	Accessories (<i>Included</i>)	Accessories (To be ordered separately)		
Consult the factory	Mounting	Mounting accessories		
[UNI] 120-277V 50/60Hz	[007500402] Aluminium case for ZETA 12 Dyno / MOLTO 6 Hybrid	[160404012] Case removing vacuum [141407400] Connector set - 5-pole [141901135] Junction Box		

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 02.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.