



# T-LIGHT ML 4 CB Module



LT2029.651-EN-T-CB-C-700-830

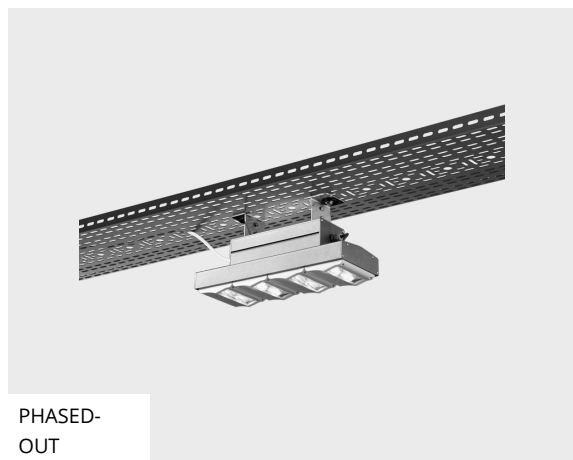

PHASED-  
OUT



[T-CB-C]  
Tunnel, Counter  
beam, Type C

## Configuration

Light distribution	[T-CB-C] 130x85°
Delivered lumens flux	7394 lm
Rated input power	70 W
Color temperature	3000 K CRI 80
Luminaire efficacy	106 lm/W
Lamp	8 LED
Color Deviation	3 SDCM
BUG rating	B2-U0-G1
Photobiological safety	Risk group 0
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000

## Options

## Technical information

Mounting	Direct tray mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	5.64 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	40" of halogen-free power cord
Notes	This product can be supplied with Insulation class (Class II) upon request. Please contact factory.

Project name					Type		Quantity	
Date			Note					
LT2029.651-EN-T-CB-C-700-830-__-__-__-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
<div><b>[T-CB-C]</b> Tunnel, Counter beam, Type C - 130x85°</div>	<div><b>[700]</b> 70 W</div>	<div><b>[830]</b> 3000 K CRI 80</div> <div><b>[740]</b> 4000 K CRI 70</div>	<div><b>[ONOFF]</b> On/Off</div> <div><b>[DALI]</b> DALI</div> <div><b>[AUTO]</b> AutoDIM</div> <div><b>[STEP]</b> StepDIM</div>	<div><b>[HM1]</b> Black</div> <div><b>[HM2]</b> Dark gray</div> <div><b>[HM3]</b> Anthracite gray</div> <div><b>[HM4]</b> Light gray</div> <div><b>[HM5]</b> White</div> <div><b>[HM6]</b> Bronze</div> <div><b>[CC]</b> Custom color (Please specify RAL code)</div>
<div>Extras</div>				
<div>Consult the factory</div>				
<div><b>[C2]</b> Class II</div>				
<div><b>[UNI]</b> 120-277V 50/60Hz</div>				
<div>Luminaire body options</div>				
<div><b>[DPC]</b> Double powder coating</div>				