




# T-LIGHT ML 2 Module



LT2029.672-EN-T-ASYM-C-700-740

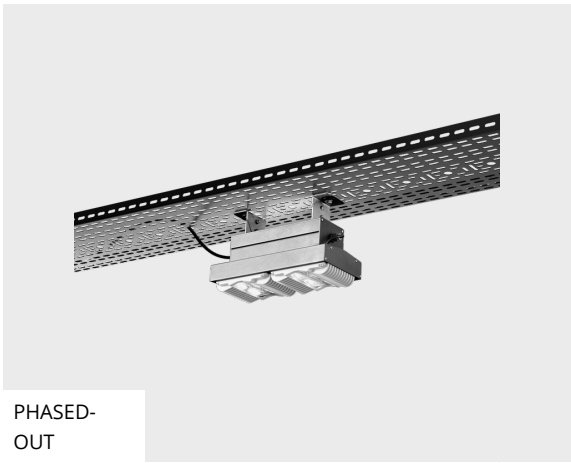

[T-ASYM-C]  
Tunnel, Asymmetric,  
Type C

## Configuration








Light distribution	[T-ASYM-C] 130x85°
Delivered lumens flux	8120 lm
Rated input power	68 W
Color temperature	4000 K CRI 70
Luminaire efficacy	116 lm/W
Lamp	8 LED
Color Deviation	3 SDCM
BUG rating	B2-U0-G1
Photobiological safety	Risk group 0
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000

## Options

## Technical information

Mounting	Direct tray mountable
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Bio-based, enriched with bisphenol A diffusor
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	3.95 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	40" of halogen-free power cord
Notes	This product can be supplied with Insulation class (Class II) upon request. Please contact factory.

Project name				Type		Quantity	
Date		Note					
LT2029.672-EN-T-ASYM-C-700-740-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[T-ASYM-C]</b> Tunnel, Asymmetric, Type C - 130x85°	<b>[700]</b> 68 W	<b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
<b>[T-SYM-C]</b> Tunnel, Symmetric, Type C - 130x85°		<b>[830]</b> 3000 K CRI 80	<b>[DALI]</b> DALI	<b>[HM2]</b>  Dark gray
			<b>[AUTO]</b> AutoDIM	<b>[HM3]</b>  Anthracite gray
			<b>[STEP]</b> StepDIM	<b>[HM4]</b>  Light gray
				<b>[HM5]</b>  White
				<b>[HM6]</b>  Bronze
				<b>[CC]</b>  Custom color (Please specify RAL code)
<b>Extras</b>				
<b>Consult the factory</b>				
<b>[C2]</b> Class II				
<b>[UNI]</b> 120-277V 50/60Hz				
<b>Luminaire body options</b>				
<b>[DPC]</b> Double powder coating				