
د الا07 IP65 🗐



LF8021.695-US-N-700-740-UNI-C1



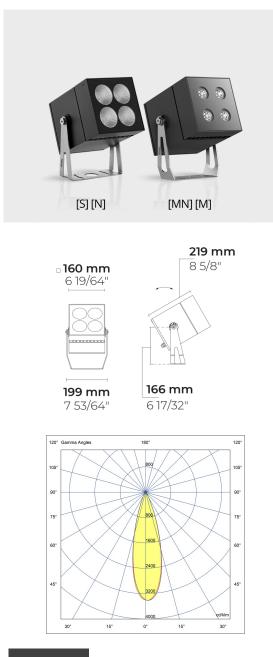

Narrow

Variant

Light distribution	[N] 26°
Delivered lumens flux	3976 lm
Rated input power	35 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	114 lm/W
Lamp	4 LED
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000

Options

Technical information

Mounting	Surface mountable via a bracket (standard) or
	spike (optional)
Tilt angle	+60°/-30°
Housing	Corrosion resistant, die-cast, marine grade
	aluminum housing
Finishing	Chromate conversion pretreatment followed by
	electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating [S] [N],
	PMMA lens with high optical efficiency [MN] [M]
Glass / Diffusor	Tempered safety glass
Impact protection	IK07
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Wind catching area	0.40 ft ²
(EPA)	
Weight	14.3 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	10/6 kV
protection	
Power factor	> 0.95
Through wiring	Single cable entry
Operating	-4050°C
temperature	
Cable	0.4 m of flexible cable

HPR Pazarlama A.Ş.

Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 02.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)



Visor for VEGA 100708017

Spike 160405040

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 02.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project na	me			Туре	Quantity	
Date			Note			
LF8021.0	595-US-N	-700-740-	UNI-C			

Light distribution	Rated input power	Colour temperature	Control	Product colours
[N] Narrow - 26°	[700] 35 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black
[S] Spot - 7°		[827] 2700 K CRI 80	[0-10V] 0-10V	[HM2] Dark grey
[MN] Medium narrow - 42°		[830] 3000 K CRI 80		[HM3] Anthracite grey
[M] Medium - 60°		[840] 4000 K CRI 80		[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] (Please specify RAL code)
Extras	Accessories (To be ordered separately)			
Luminaire body	Optical accessories	_		
[DPC] Double powder coating	[100708017] Visor for VEGA			
	Mounting accessories			
	[160405040] Spike			

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 02.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.