

TRIAN L AFX Mini

CE UK CA IK08 IP65



LL6020.895-EN-T3-500-830-EN-C1




Variant

Light distribution	[T3] 131x60°
Delivered lumens flux	2691 lm
Rated input power	18 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	142 lm/W
Lamp	12 LED
MacAdam Ellipse	3 SDCM
BUG rating	B2-U2-G3
Photobiological safety	RG0
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,018

Options

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	48.5kg(4m) , 56.2kg(6m) , 64kg(6m)
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

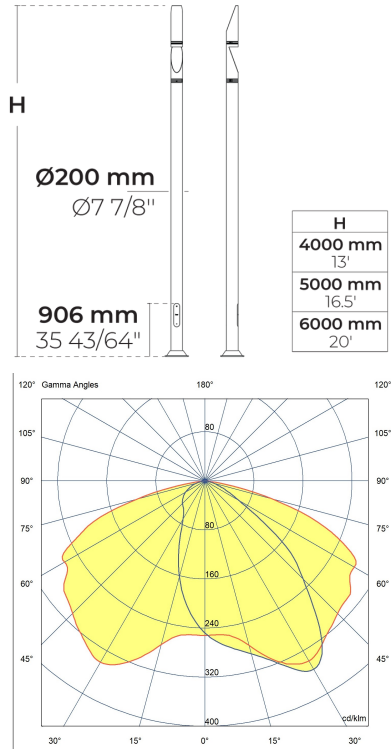

[T3]

Type III, Asymmetric,
Side throw


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 02.06.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)


Anchorage



90DJ006

90DJ006

Anchorage



90CJ004

90CJ004

Project name		Type		Quantity	
Date		Note			
LL6020.895-EN-T3-500-830-__-EN-C1-__-__-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[T3] Type III, Asymmetric, Side throw - 131x60°	[500] 18 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black
[T2-2] Type II, Asymmetric, Side throw - 134x52°	[700] 26 W	[822] 2200 K CRI 80	[DALI] DALI	[HM2] Dark grey
	[350] 12 W	[827] 2700 K CRI 80	[AUTO] AutoDIM	[HM3] Anthracite grey
		[740] 4000 K CRI 70	[STEP] StepDIM	[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] Custom colour (Please specify RAL code)
Height	Extras	Accessories (<i>To be ordered separately</i>)		
[H4] 4m [H5] 5m [H6] 6m	External surge protection	Anchorage		
	[SP10] 10 kV	[90DJ006] 90DJ006		
	Light output	[90CJ004] 90CJ004		
	[CLO] Constant light output			
	Consult the factory			
	[C2] Class II			
	Luminaire body options			
	[DPC] Double powder coating			