


URBAN UNITS Top Module

CE UK CA IK08 IP65



LP4054.538-EN-SYM-700-827-EN-C1

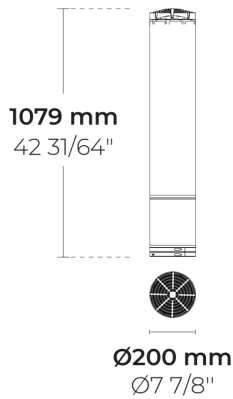

[SYM]
Symmetric

Variant

Light distribution	[SYM] 108.4
Delivered lumens flux	4896 lm
Rated input power	48 W
Colour temperature	2700 K CRI 80
Luminaire efficacy	98 lm/W
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>102 000
Lifetime L80B50 (hour)	>102 000

Options

Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	11 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable

Poles (Included)

Product specific poles with flange plate



Variant code	Height	Diameter / Dimensions	Spigot diameter
PAFC.C01.T001-H3	3m	Ø200mm	
PAFC.C01.T001-H4	4m	Ø200mm	
PAFC.C01.T001-H5	5m	Ø200mm	

Project name		Type		Quantity	
Date		Note			
LP4054.538-EN-SYM-700-827-__-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SYM] Symmetric - 108.4	[700] 48 W	[827] 2700 K CRI 80	[ONOFF] On/Off	[HM1] Black 
	[1050] 72 W	[822] 2200 K CRI 80 [830] 3000 K CRI 80 [740] 4000 K CRI 70	[DALI] DALI	[HM2] Dark grey  [HM3] Anthracite grey  [HM4] Light grey  [HM5] White  [HM6] Bronze  [CC]  Custom colour (Please specify RAL code)
Extras				
External surge protection				
[SP10] 10 kV				
Light output				
[CLO] Constant light output				
Consult the factory				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				