


URBAN UNITS Top Module



LP4054.538-EN-SYM-700-740

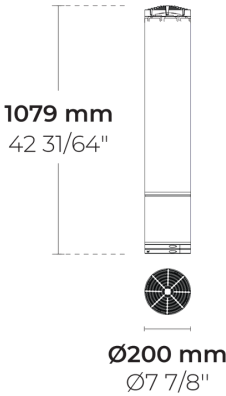

[SYM]
Symmetric

Configuration

Light distribution	[SYM] 108.4
Delivered lumens flux	5160 lm
Rated input power	48 W
Color temperature	4000 K CRI 70
Luminaire efficacy	103 lm/W
Color Deviation	3 SDCM
Lifetime L90 (hour)	>102 000
Lifetime L80 (hour)	>102 000

Options

Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	11 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

Poles (Included)

Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFC.C01.T001-H3	10'	Ø 7 7/8"	
PAFC.C01.T001-H4	13.1'	Ø 7 7/8"	
PAFC.C01.T001-H5	16.4'	Ø 7 7/8"	

Project name				Type		Quantity	
Date		Note					
LP4054.538-EN-SYM-700-740-__-__-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
[SYM] Symmetric - 108.4	[700] 48 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black
	[1050] 72 W	[822] 2200 K CRI 80	[DALI] DALI	[HM2] Dark gray
		[827] 2700 K CRI 80		[HM3] Anthracite gray
		[830] 3000 K CRI 80		[HM4] Light gray
				[HM5] White
				[HM6] Bronze
				[CC] Custom color (Please specify RAL code)
Extras				
External surge protection				
[SP10] 10 kV				
Light output				
[CLO] Constant light output				
Consult the factory				
[UNI] 120-277V 50/60Hz				
Luminaire body options				
[DPC] Double powder coating				