


# URBAN UNITS Top Module



LP4054.538-US-SYM-700-830

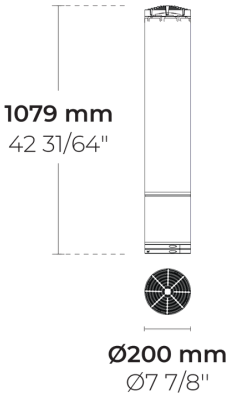

[SYM]  
Symmetric

## Configuration

Light distribution	[SYM] 108.4
Delivered lumens flux	4631 lm
Rated input power	48 W
Color temperature	3000 K CRI 80
Luminaire efficacy	98 lm/W
Color Deviation	3 SDCM
Lifetime L90 (hour)	>102 000
Lifetime L80 (hour)	>102 000

## Options

## Technical information

Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	UV stable, bio-based polycarbonate diffusor
Impact protection	IK08
Ingress protection	IP65
Input voltage	120-277V 50/60Hz
Insulation class	Class I
Weight	24 lbs
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	20" of outdoor use rated flexible power cord

# Poles (Included)








---

## Product specific poles with base plate



Configuration code	Height	Diameter / Dimensions	Spigot / End diameter
PAFC.C01.T001-H3	10'	Ø 7 7/8"	
PAFC.C01.T001-H4	13.1'	Ø 7 7/8"	
PAFC.C01.T001-H5	16.4'	Ø 7 7/8"	

Project name				Type		Quantity	
Date		Note					
LP4054.538-US-SYM-700-830-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SYM]</b> Symmetric - 108.4	<b>[700]</b> 48 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[HM1]</b>  Black
	<b>[1050]</b> 72 W	<b>[822]</b> 2200 K CRI 80  <b>[827]</b> 2700 K CRI 80  <b>[740]</b> 4000 K CRI 70	<b>[0-10V]</b> 0-10V	<b>[HM2]</b>  Dark gray  <b>[HM3]</b>  Anthracite gray  <b>[HM4]</b>  Light gray  <b>[HM5]</b>  White  <b>[HM6]</b>  Bronze  <b>[CC]</b>  Custom color (Please specify RAL code)
<b>Extras</b>				
<b>Luminaire body options</b>				
<b>[DPC]</b> Double powder coating				