



VERTEX C 1 Module

CE UK CA IK08 IP66

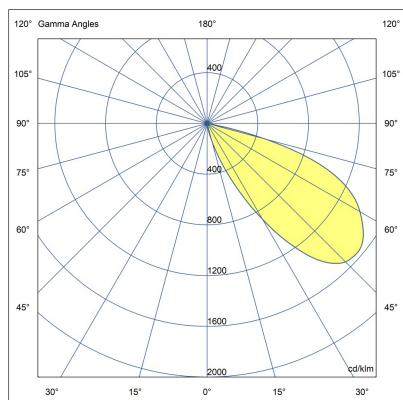

LD6064.591-EN-SLFB-350-840-CC-18V-350-C1-HM1

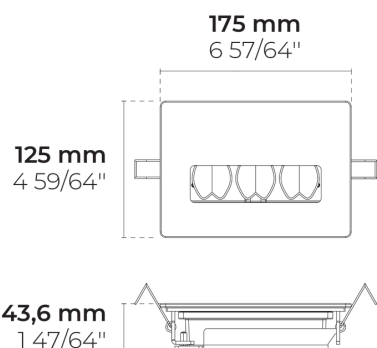

[SLFB]

Special linear,
Forward throw

Variant

Light distribution	[SLFB] 144x41°
Delivered lumens flux	450 lm
Rated input power	8 W
Colour temperature	4000 K CRI 80
Luminaire efficacy	56 lm/W
Lamp	6 LED
MacAdam Ellipse	3 SDCM
Lifetime L90B50 (hour)	>60,000
Lifetime L80B50 (hour)	>60,000

Options

Technical information

Mounting	Ceiling mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	18 Vdc (Max) 350 mA
Insulation class	Class I
Weight	0.72 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.2 m of flexible cable


HPR Pazarlama A.Ş.
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,
Sincan, 06909 Ankara, Turkey
+90 312 267 54 30
info@hepergroup.com

HEPER Europe GmbH
Ahornweg 5a, 58675
Hemer, Germany
+49 237 2901 2975
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.
For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

Mounting accessories



**DALI & On/Off
driver within an
IP67 box for
VERTEX C**

007502867

Project name		Type		Quantity	
Date		Note			
LD6064.591-EN-SLFB-350-840-__-CC-18V-350-C1-HM1-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLFB] Special linear, Forward throw - 144x41°	[350] 8 W	[840] 4000 K CRI 80		[HM1] Black 
		[822] 2200 K CRI 80		
		[827] 2700 K CRI 80		
		[830] 3000 K CRI 80		
		[740] 4000 K CRI 70		
Extras	Accessories (<i>To be ordered separately</i>)			
Consult the factory	Mounting accessories			
[C2] Class II	[007502867] DALI & On/Off driver within an IP67 box for VERTEX C			
[UNI] 120-277V 50/60Hz				