



# VERTEX C 1 Module

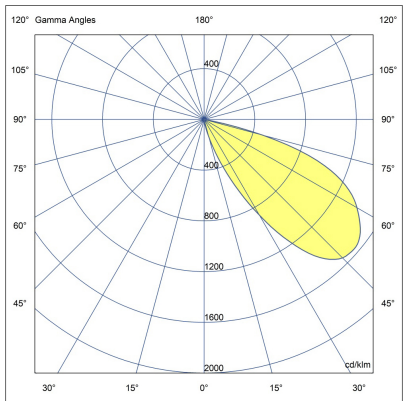

LD6064.591-EN-SLFB-350-822-HM1

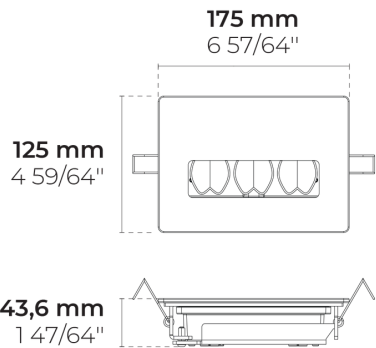

[SLFB]

Special linear,  
Forward throw

## Configuration

Light distribution	[SLFB] 144x41°
Delivered lumens flux	363 lm
Rated input power	8 W
Color temperature	2200 K CRI 80
Luminaire efficacy	45 lm/W
Lamp	6 LED
Color Deviation	3 SDCM
Lifetime L90 (hour)	>60,000
Lifetime L80 (hour)	>60,000

## Options


## Technical information

Mounting	Ceiling mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	18 Vdc (Max) 350 mA
Insulation class	Class I
Weight	0.72 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single power cord entry
Operating temperature	-25...50°C
Power cord	8" of flexible power cord

## Accessories (To be ordered separately)

---

### Mounting accessories



**DALI & On/Off  
driver within an  
IP67 box for  
VERTEX C**

007502867

Project name					Type		Quantity	
Date		Note						
LD6064.591-EN-SLFB-350-822-__-HM1-__								

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[SLFB]</b> Special linear, Forward throw - 144x41°	<b>[350]</b> 8 W	<b>[822]</b> 2200 K CRI 80		<b>[HM1]</b> Black
		<b>[827]</b> 2700 K CRI 80  <b>[830]</b> 3000 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80		
Extras	Accessories ( <i>To be ordered separately</i> )			
Consult the factory	Mounting accessories			
<b>[C2]</b> Class II  <b>[UNI]</b> 120-277V 50/60Hz	<b>[007502867]</b> DALI & On/Off driver within an IP67 box for VERTEX C			