
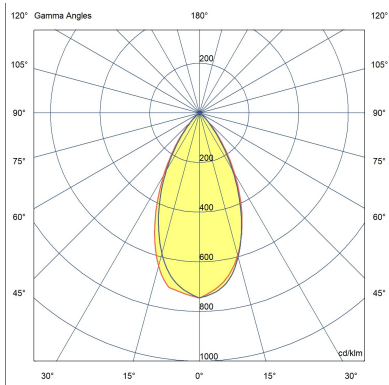


LF8040.528-EN-M-350-830-CC-12V-350-C3

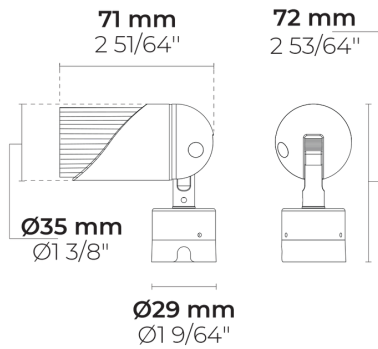

[M]  
Medium

## Variant

Light distribution	[M] 52°
Delivered lumens flux	272 lm
Rated input power	4 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	65 lm/W
Lamp	1 LED
MacAdam Ellipse	3 SDCM
BUG rating	B0-U1-G0
Lifetime L90B50 (hour)	>100,000
Lifetime L80B50 (hour)	>100,000

## Options


## Technical information

Mounting	Surface mountable via a stationary base (standard), spike and wall-mountable via a bracket (both optional)
Tilt angle	+90°/0°
Rotation angle	0°/+355°
Housing	Corrosion resistant, marine grade aluminum housing
Finishing	Knurled surface in black anodized aluminum and body in chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 316L)
Gasket	EPDM gasket (Shore A 25-30)
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK05
Ingress protection	IP66
Input voltage	12 Vdc (Max) 350 mA
Insulation class	Class III
Weight	0.25 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.2 m of flexible cable

## Accessories (To be ordered separately)

---








### Mounting accessories



**DALI & On/Off  
driver within an  
IP67 box for  
SPARK S**

007502876

Project name		Type		Quantity	
Date		Note			
LF8040.528-EN-M-350-830-__-CC-12V-350-C3-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[M]</b> Medium - 52°	<b>[350]</b> 4 W	<b>[830]</b> 3000 K CRI 80		<b>[HM1]</b> Black 
<b>[VN]</b> Very narrow - 16°	<b>[350]</b> 6 W	<b>[927]</b> 2700 K CRI 90		<b>[HM2]</b> Dark grey 
<b>[MN]</b> Medium narrow - 38°		<b>[930]</b> 3000 K CRI 90		<b>[HM3]</b> Anthracite grey 
				<b>[HM4]</b> Light grey 
				<b>[HM5]</b> White 
				<b>[HM6]</b> Bronze 
				<b>[CC]</b>  Custom colour (Please specify RAL code)
<b>Extras</b>	<b>Accessories (<i>To be ordered separately</i>)</b>			
<b>Light output</b>	<b>Mounting accessories</b>			
<b>[BCF]</b> Blue Colour Filter	<b>[007502876]</b> DALI & On/Off driver within an IP67 box for SPARK S			
<b>[GCF]</b> Green Colour Filter				
<b>[HNY]</b> Honeycomb				
<b>[OCF]</b> Orange Colour Filter				
<b>[RCF]</b> Red Colour Filter				
<b>[YCF]</b> Yellow Colour Filter				
<b>Luminaire body options</b>				
<b>[DPC]</b> Double powder coating				