


# GOLEDO-T 64 LED

UK  
CA

IK08 IP66



LT2037.767-EN-T-SYM-D-500-740-EN-C1

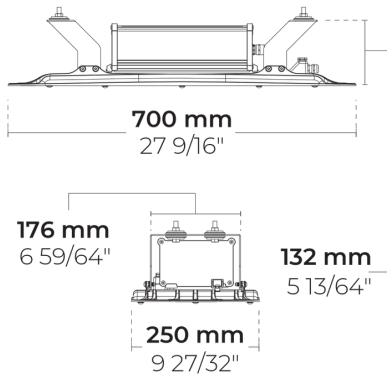

[T-SYM-D]

Tunnel, Symmetric,  
Type D

## Variant

|                        |               |
|------------------------|---------------|
| Light distribution     | [T-SYM-D]     |
| Delivered lumens flux  | 21875 lm      |
| Rated input power      | 143 W         |
| Colour temperature     | 4000 K CRI 70 |
| Luminaire efficacy     | 153 lm/W      |
| Lamp                   | 64 LED        |
| MacAdam Ellipse        | 4 SDCM        |
| Lifetime L90B50 (hour) | >102,000      |
| Lifetime L80B50 (hour) | >102,000      |

## Options

## Technical information

|                         |                                                                                                     |
|-------------------------|-----------------------------------------------------------------------------------------------------|
| Mounting                | Standard strap connection. Sliding mounting bracket is optional through extra                       |
| Housing                 | Corrosion resistant, die-cast, marine grade aluminum housing                                        |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating                           |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                                        |
| Gasket                  | Silicone                                                                                            |
| Lens / Reflector        | PMMA lens with high optical efficiency                                                              |
| Glass / Diffusor        | Tempered safety glass                                                                               |
| Impact protection       | IK08                                                                                                |
| Ingress protection      | IP66                                                                                                |
| Input voltage           | 220-240V 50/60Hz                                                                                    |
| Insulation class        | Class I                                                                                             |
| Weight                  | 9.4 kg                                                                                              |
| LED module              | High power LEDs on metal-core PCB                                                                   |
| Driver                  | Internal LED driver                                                                                 |
| Driver surge protection | 10/6 kV                                                                                             |
| Power factor            | > 0.95                                                                                              |
| Through wiring          | Single cable entry                                                                                  |
| Operating temperature   | -40...50°C                                                                                          |
| Cable                   | 1 m of halogen-free cable                                                                           |
| Notes                   | This product can be supplied with Insulation class (Class II) upon request. Please contact factory. |

|                                                              |  |             |  |                 |  |
|--------------------------------------------------------------|--|-------------|--|-----------------|--|
| <b>Project name</b>                                          |  | <b>Type</b> |  | <b>Quantity</b> |  |
| <b>Date</b>                                                  |  | <b>Note</b> |  |                 |  |
| <b>LT2037.767-EN-T-SYM-D-500-740-__-EN-C1-__-__-__-__-__</b> |  |             |  |                 |  |

| Light distribution                                 | Rated input power     | Colour temperature            | Control                  | Product colours                                                                                                                               |
|----------------------------------------------------|-----------------------|-------------------------------|--------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[T-SYM-D]</b><br>Tunnel, Symmetric,<br>Type D   | <b>[500]</b><br>143 W | <b>[740]</b><br>4000 K CRI 70 | <b>[ONOFF]</b><br>On/Off | <b>[CC]</b> <br>Custom colour (Please<br>specify RAL code) |
| <b>[T-ASYM-A]</b><br>Tunnel, Asymmetric,<br>Type A | <b>[700]</b><br>137 W | <b>[730]</b><br>3000 K CRI 70 | <b>[0-10V]</b><br>0-10V  | <b>[7035]</b> <br>Light grey (RAL 7035)                    |
| <b>[T-ASYM-B]</b><br>Tunnel, Asymmetric,<br>Type B | <b>[500]</b><br>142 W |                               | <b>[DALI]</b><br>DALI    |                                                                                                                                               |
| <b>[T-ASYM-C]</b><br>Tunnel, Asymmetric,<br>Type C | <b>[500]</b><br>92 W  |                               | <b>[AUTO]</b><br>AutoDIM |                                                                                                                                               |
| <b>[T-ASYM-D]</b><br>Tunnel, Asymmetric,<br>Type D | <b>[500]</b><br>139 W |                               | <b>[STEP]</b><br>StepDIM |                                                                                                                                               |
| <b>[T-ASYM-D]</b><br>Tunnel, Asymmetric,<br>Type D | <b>[500]</b><br>91 W  |                               |                          |                                                                                                                                               |
| <b>[T-ASYM-D]</b><br>Tunnel, Asymmetric,<br>Type D | <b>[500]</b><br>141 W |                               |                          |                                                                                                                                               |
| <b>[T-CB-A]</b><br>Tunnel, Counter<br>beam, Type A | <b>[350]</b><br>62 W  |                               |                          |                                                                                                                                               |
| <b>[T-CB-B]</b><br>Tunnel, Counter<br>beam, Type B | <b>[350]</b><br>96 W  |                               |                          |                                                                                                                                               |
| <b>[T-CB-B]</b><br>Tunnel, Counter<br>beam, Type B | <b>[350]</b><br>95 W  |                               |                          |                                                                                                                                               |
| <b>[T-SYM-A]</b><br>Tunnel, Symmetric,<br>Type A   | <b>[500]</b><br>138 W |                               |                          |                                                                                                                                               |
| <b>[T-SYM-B]</b><br>Tunnel, Symmetric,<br>Type B   | <b>[350]</b><br>94 W  |                               |                          |                                                                                                                                               |
| <b>[T-SYM-B]</b><br>Tunnel, Symmetric,<br>Type B   | <b>[350]</b><br>94 W  |                               |                          |                                                                                                                                               |
| <b>[T-SYM-C]</b><br>Tunnel, Symmetric,<br>Type C   | <b>[350]</b><br>97 W  |                               |                          |                                                                                                                                               |
| <b>Extras</b>                                      |                       |                               |                          |                                                                                                                                               |

|                                       |
|---------------------------------------|
| <b>External surge protection</b>      |
| <b>[SP10]</b><br>10 kV                |
| <b>Light output</b>                   |
| <b>[CLO]</b><br>Constant light output |
| <b>Consult the factory</b>            |
| <b>[C2]</b><br>Class II               |
| <b>[UNI]</b><br>120-277V 50/60Hz      |
| <b>Luminaire body options</b>         |
| <b>[DPC]</b><br>Double powder coating |