


GOLEDO-T 96 LED



LT2037.886-EN-T-ASYM-B-350-730

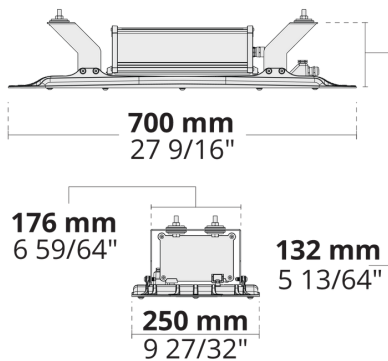

[T-ASYM-C]
Tunnel, Asymmetric,
Type C

Configuration

| | |
|-----------------------|---------------|
| Light distribution | [T-ASYM-C] |
| Delivered lumens flux | 15575 lm |
| Rated input power | 100 W |
| Color temperature | 3000 K CRI 70 |
| Luminaire efficacy | 156 lm/W |
| Lamp | 96 LED |
| Color Deviation | 3 SDCM |
| Lifetime L90 (hour) | >102,000 |
| Lifetime L80 (hour) | >102,000 |

Options

Technical information

| | |
|-------------------------|---|
| Mounting | Standard strap connection. Sliding mounting bracket is optional through extra |
| Housing | Corrosion resistant, die-cast, marine grade aluminum housing |
| Finishing | Chromate conversion pretreatment followed by electrostatic powder coating |
| Fasteners | Stainless steel (AISI 304 / EN 1.4301 grade) |
| Gasket | Silicone |
| Lens / Reflector | PMMA lens with high optical efficiency |
| Glass / Diffusor | Tempered safety glass |
| Impact protection | IK08 |
| Ingress protection | IP66 |
| Input voltage | 220-240V 50/60Hz |
| Insulation class | Class I |
| Weight | 10.2 kg |
| LED module | High power LEDs on metal-core PCB |
| Driver | Internal LED driver |
| Driver surge protection | 10/6 kV |
| Power factor | > 0.95 |
| Through wiring | Single power cord entry |
| Operating temperature | -40...50°C |
| Power cord | 40" of halogen-free power cord |
| Notes | This product can be supplied with Insulation class (Class II) upon request. Please contact factory. |

| |
|---------------------------------------|
| External surge protection |
| [SP10] 10 kV |
| Light output |
| [CLO] Constant light output |
| Consult the factory |
| [C2] Class II |
| [UNI] 120-277V 50/60Hz |
| Luminaire body options |
| [DPC] Double powder coating |