



## GOLEDO-IN 32 LED

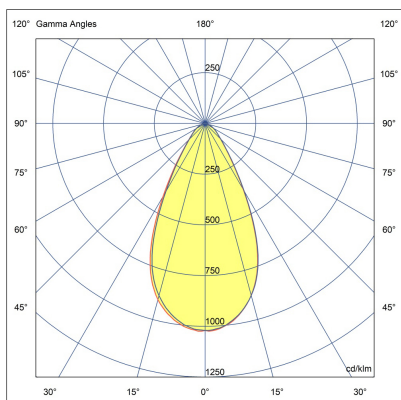

LW2037.761-EN-M-700-830

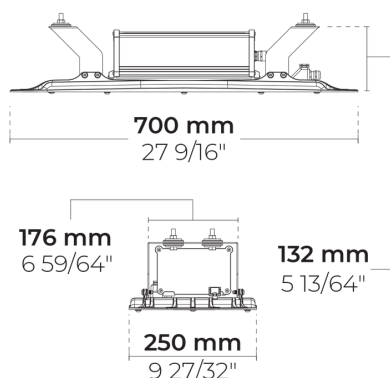

**[M]**  
Medium - NEMA  
Type 4

## Configuration



<b>Light distribution</b>	[M] 50°
<b>Delivered lumens flux</b>	7515 lm
<b>Rated input power</b>	68 W
<b>Color temperature</b>	3000 K CRI 80
<b>Luminaire efficacy</b>	110 lm/W
<b>Lamp</b>	32 LED
<b>Color Deviation</b>	3 SDCM
<b>BUG rating</b>	B4-U0-G1
<b>Lifetime L90 (hour)</b>	>102,000
<b>Lifetime L80 (hour)</b>	>102,000

## Options

## Technical information

<b>Mounting</b>	Standard strap connection. Sliding mounting bracket is optional through extra
<b>Housing</b>	Corrosion resistant, die-cast, marine grade aluminum housing
<b>Finishing</b>	Chromate conversion pretreatment followed by electrostatic powder coating
<b>Fasteners</b>	Stainless steel (AISI 304 / EN 1.4301 grade)
<b>Gasket</b>	Silicone
<b>Lens / Reflector</b>	PMMA lens with high optical efficiency
<b>Glass / Diffusor</b>	Tempered safety glass
<b>Impact protection</b>	IK08
<b>Ingress protection</b>	IP66
<b>Input voltage</b>	220-240V 50/60Hz
<b>Insulation class</b>	Class I
<b>Weight</b>	8.86 kg
<b>LED module</b>	High power LEDs on metal-core PCB
<b>Driver</b>	Internal LED driver
<b>Driver surge protection</b>	10/6 kV
<b>Power factor</b>	> 0.95
<b>Through wiring</b>	Single power cord entry
<b>Operating temperature</b>	-40...50°C
<b>Power cord</b>	40" of halogen-free power cord
<b>Notes</b>	This product can be supplied with Insulation class (Class II) upon request. Please contact factory.

Project name				Type		Quantity	
Date		Note					
LW2037.761-EN-M-700-830-__-__-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[M]</b> Medium - NEMA Type 4 - 50°	<b>[700]</b> 68 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[CC]</b>  Custom color (Please specify RAL code)
<b>[N]</b> Narrow - NEMA Type 2 - 25°	<b>[500]</b> 46 W	<b>[840]</b> 4000 K CRI 80	<b>[0-10V]</b> 0-10V  <b>[DALI]</b> DALI  <b>[AUTO]</b> AutoDIM  <b>[STEP]</b> StepDIM	<b>[7035]</b>  Light gray (RAL 7035)
<b>Extras</b>				
<b>External surge protection</b>				
<b>[SP10]</b> 10 kV				
<b>Light output</b>				
<b>[CLO]</b> Constant light output				
<b>Consult the factory</b>				
<b>[C2]</b> Class II				
<b>[UNI]</b> 120-277V 50/60Hz				
<b>Luminaire body options</b>				
<b>[DPC]</b> Double powder coating				