



# GOLEDO-IN 40 LED

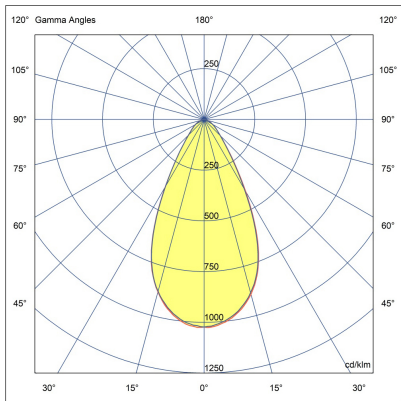

LW2037.765-EN-M-700-830

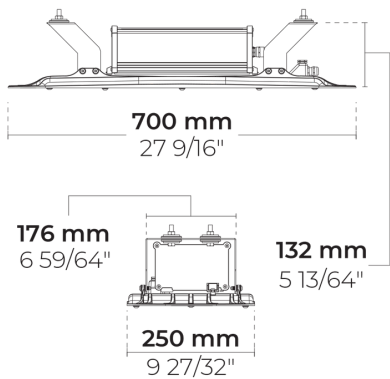

[M]

Medium - NEMA  
Type 4

## Configuration



Light distribution	[M] 50°
Delivered lumens flux	9396 lm
Rated input power	85 W
Color temperature	3000 K CRI 80
Luminaire efficacy	104 lm/W
Lamp	40 LED
Color Deviation	3 SDCM
BUG rating	B4-U0-G1
Lifetime L90 (hour)	>102,000
Lifetime L80 (hour)	>102,000

## Options

## Technical information

Mounting	Standard strap connection. Sliding mounting bracket is optional through extra
Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	PMMA lens with high optical efficiency
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP66
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	9.01 kg
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	10/6 kV
Power factor	> 0.95
Through wiring	Single power cord entry
Operating temperature	-40...50°C
Power cord	40" of halogen-free power cord
Notes	This product can be supplied with Insulation class (Class II) upon request. Please contact factory.

Project name				Type		Quantity	
Date		Note					
LW2037.765-EN-M-700-830-__-__-__-__-__-__							

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[M]</b> Medium - NEMA Type 4 - 50°	<b>[700]</b> 85 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off	<b>[CC]</b>  Custom color (Please specify RAL code)
<b>[N]</b> Narrow - NEMA Type 2 - 25°	<b>[500]</b> 58 W	<b>[840]</b> 4000 K CRI 80	<b>[0-10V]</b> 0-10V  <b>[DALI]</b> DALI  <b>[AUTO]</b> AutoDIM  <b>[STEP]</b> StepDIM	<b>[7035]</b>  Light gray (RAL 7035)
<b>Extras</b>				
<b>External surge protection</b>				
<b>[SP10]</b> 10 kV				
<b>Light output</b>				
<b>[CLO]</b> Constant light output				
<b>Consult the factory</b>				
<b>[C2]</b> Class II				
<b>[UNI]</b> 120-277V 50/60Hz				
<b>Luminaire body options</b>				
<b>[DPC]</b> Double powder coating				