


LL2017.663-EN-T2-700-740-EN-C1



PHASED-  
OUT

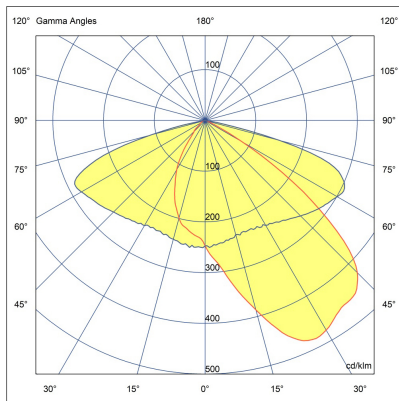

[T2]

Type II, Asymmetric,  
Side throw

## Variant

|                               |               |
|-------------------------------|---------------|
| <b>Light distribution</b>     | [T2] 130x85°  |
| <b>Delivered lumens flux</b>  | 10346 lm      |
| <b>Rated input power</b>      | 101 W         |
| <b>Colour temperature</b>     | 4000 K CRI 70 |
| <b>Luminaire efficacy</b>     | 99 lm/W       |
| <b>Lamp</b>                   | 12 LED        |
| <b>MacAdam Ellipse</b>        | 5 SDCM        |
| <b>BUG rating</b>             | B2-U0-G2      |
| <b>Photobiological safety</b> | Risk group 0  |
| <b>Lifetime L90B50 (hour)</b> | >60,000       |
| <b>Lifetime L80B50 (hour)</b> | >60,000       |

## Options

## Technical information

|                                 |                                                                                                     |
|---------------------------------|-----------------------------------------------------------------------------------------------------|
| <b>Mounting</b>                 | Direct pole or side bracket mountable. Spigot: Ø60 mm x 100 mm                                      |
| <b>Housing</b>                  | Corrosion resistant, die-cast, marine grade aluminum housing                                        |
| <b>Finishing</b>                | Chromate conversion pretreatment followed by electrostatic powder coating                           |
| <b>Fasteners</b>                | Stainless steel (AISI 304 / EN 1.4301 grade)                                                        |
| <b>Gasket</b>                   | Silicone                                                                                            |
| <b>Lens / Reflector</b>         | High reflectance aluminium coating, multifaceted micro reflector                                    |
| <b>Glass / Diffusor</b>         | Bio-based, enriched with bisphenol A diffusor                                                       |
| <b>Impact protection</b>        | IK08                                                                                                |
| <b>Ingress protection</b>       | IP66                                                                                                |
| <b>Input voltage</b>            | 220-240V 50/60Hz                                                                                    |
| <b>Insulation class</b>         | Class I                                                                                             |
| <b>Wind catching area (EPA)</b> | 0.31 m <sup>2</sup>                                                                                 |
| <b>Weight</b>                   | 9.04 kg                                                                                             |
| <b>LED module</b>               | Multi-chip high power LEDs on metal-core PCB                                                        |
| <b>Driver</b>                   | Internal LED driver                                                                                 |
| <b>Driver surge protection</b>  | 4/4 kV                                                                                              |
| <b>Power factor</b>             | > 0.97                                                                                              |
| <b>Through wiring</b>           | Single cable entry                                                                                  |
| <b>Operating temperature</b>    | -40...50°C                                                                                          |
| <b>Cable</b>                    | 0.5 m of flexible cable                                                                             |
| <b>Notes</b>                    | This product can be supplied with Insulation class (Class II) upon request. Please contact factory. |

|                                                         |  |             |  |                 |  |
|---------------------------------------------------------|--|-------------|--|-----------------|--|
| <b>Project name</b>                                     |  | <b>Type</b> |  | <b>Quantity</b> |  |
| <b>Date</b>                                             |  | <b>Note</b> |  |                 |  |
| <b>LL2017.663-EN-T2-700-740-__-EN-C1-__-__-__-__-__</b> |  |             |  |                 |  |

| Light distribution                                          | Rated input power     | Colour temperature            | Control                  | Product colours                                                                                                                            |
|-------------------------------------------------------------|-----------------------|-------------------------------|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>[T2]</b><br>Type II, Asymmetric,<br>Side throw - 130x85° | <b>[700]</b><br>101 W | <b>[740]</b><br>4000 K CRI 70 | <b>[ONOFF]</b><br>On/Off | <b>[HM3]</b><br>Anthracite grey                         |
|                                                             |                       | <b>[730]</b><br>3000 K CRI 70 | <b>[DALI]</b><br>DALI    | <b>[HM4]</b><br>Light grey                              |
|                                                             |                       | <b>[830]</b><br>3000 K CRI 80 | <b>[AUTO]</b><br>AutoDIM | <b>[CC]</b><br>Custom colour (Please specify RAL code)  |
| <b>Extras</b>                                               |                       |                               |                          |                                                                                                                                            |
| <b>External surge protection</b>                            |                       |                               |                          |                                                                                                                                            |
| <b>[SP10]</b><br>10 kV                                      |                       |                               |                          |                                                                                                                                            |
| <b>Connectivity</b>                                         |                       |                               |                          |                                                                                                                                            |
| <b>[NM7]</b><br>NEMA socket - 7 Pin                         |                       |                               |                          |                                                                                                                                            |
| <b>Consult the factory</b>                                  |                       |                               |                          |                                                                                                                                            |
| <b>[C2]</b><br>Class II                                     |                       |                               |                          |                                                                                                                                            |
| <b>[UNI]</b><br>120-277V 50/60Hz                            |                       |                               |                          |                                                                                                                                            |
| <b>Luminaire body options</b>                               |                       |                               |                          |                                                                                                                                            |
| <b>[DPC]</b><br>Double powder coating                       |                       |                               |                          |                                                                                                                                            |