
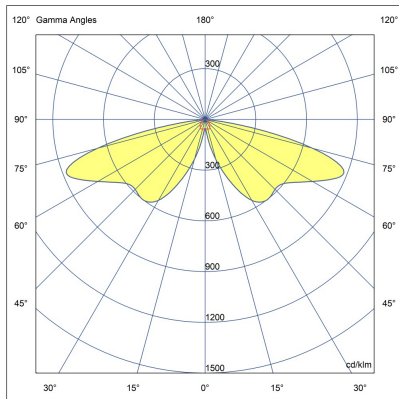


LB6068.570-EN-SLFB-700-830-ONOFF-EN-C1

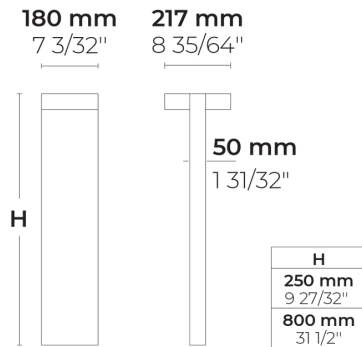

[SLFB]

Special linear,
Forward throw

Variant

Light distribution	[SLFB] 65x70°
Delivered lumens flux	3696 lm
Rated input power	40 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	92 lm/W
Lamp	8 LED
MacAdam Ellipse	3 SDCM
BUG rating	B1-U0-G1
Lifetime L90B50 (hour)	>42,000
Lifetime L80B50 (hour)	>42,000

Options


Control	ONOFF
---------	-------

Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	4.11 kg (0.25 m), 5.67 kg (0.8 m)
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable
Notes	3000K CCT or warmer must be selected to be DarkSky International certified.

Accessories (To be ordered separately)

Anchorage



628I000

628I000

Project name		Type		Quantity	
Date		Note			
LB6068.570-EN-SLFB-700-830-ONOFF-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours	
[SLFB] Special linear, Forward throw - 65x70°	[700] 40 W	[830] 3000 K CRI 80	[ONOFF] On/Off	[HM1] Black	
	[350] 20 W	[822] 2200 K CRI 80		[HM2] Dark grey	
		[827] 2700 K CRI 80		[HM3] Anthracite grey	
		[740] 4000 K CRI 70		[HM4] Light grey	
		[840] 4000 K CRI 80		[HM5] White	
				[HM6] Bronze	
				[CC] Custom colour (Please specify RAL code)	
Height	Extras	Accessories (<i>To be ordered separately</i>)			
[H0.25] 25cm [H0.80] 80cm [HC]	Consult the factory	Anchorages			
	[EK] Emergency kit	[628I000] 628I000			
	[MS] Motion sensor				
	Luminaire body options				
	[DPC] Double powder coating				