



# DRAGO Ex Side

CE UK CA IK08 IP65

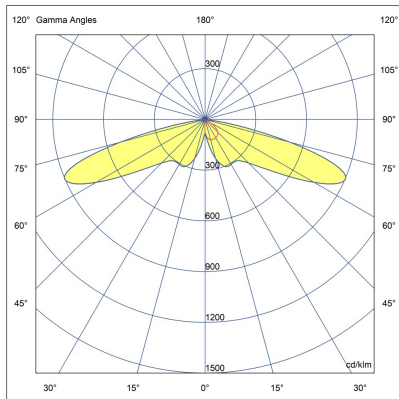

LB7035.585-EN-SLSB-350-740-EN-C1

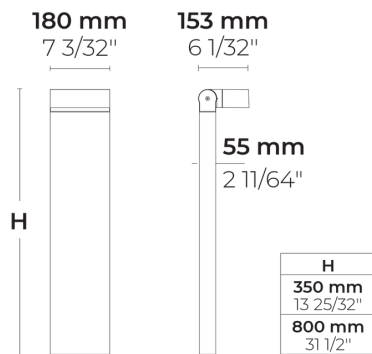

[SLSB]

Special linear, Side throw

## Variant

|                        |                |
|------------------------|----------------|
| Light distribution     | [SLSB] 145x45° |
| Delivered lumens flux  | 525 lm         |
| Rated input power      | 5 W            |
| Colour temperature     | 4000 K CRI 70  |
| Luminaire efficacy     | 105 lm/W       |
| Lamp                   | 2 LED          |
| MacAdam Ellipse        | 3 SDCM         |
| BUG rating             | B0-U0-G0       |
| Lifetime L90B50 (hour) | >42,000        |
| Lifetime L80B50 (hour) | >42,000        |

## Options

## Technical information

|                         |   |
|-------------------------|---|
| Mounting                | Surface mountable   |
| Tilt angle              | +135°/0°  |
| Housing                 | Corrosion resistant, extruded, marine grade aluminum housing                    |
| Finishing               | Chromate conversion pretreatment followed by electrostatic powder coating       |
| Fasteners               | Stainless steel (AISI 304 / EN 1.4301 grade)                                    |
| Gasket                  | Liquid silicone   |
| Lens / Reflector        | High reflectance aluminium coating, multifaceted micro reflector                |
| Glass / Diffusor        | Tempered safety glass   |
| Impact protection       | IK08  |
| Ingress protection      | IP65  |
| Input voltage           | 220-240V 50/60Hz  |
| Insulation class        | Class I   |
| Weight                  | 4.50 kg (0.35 m), 6.0 kg (0.8 m)  |
| LED module              | High power LEDs on metal-core PCB   |
| Driver                  | Internal LED driver   |
| Driver surge protection | 1/1 kV  |
| Power factor            | > 0.90  |
| Through wiring          | Single cable entry  |
| Operating temperature   | -40...50°C  |
| Cable                   | 0.5 m of flexible cable   |
| Notes                   | QUICK SHIP: Some variants will be delivered faster. Please consult the factory. |

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com


HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 14.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---

### Anchorage



**628I000**

628I000

|   |  |      |  |          |  |
|---|--|------|--|----------|--|
| Project name                                    |  | Type |  | Quantity |  |
| Date  |  | Note |  |          |  |
| LB7035.585-EN-SLSB-350-740-__-EN-C1-__-__-__-__ |  |      |  |          |  |

| Light distribution                             | Rated input power              | Colour temperature   | Control           | Product colours   |
|--|--------------------------------|--|-------------------|---|
| [SLSB]<br>Special linear, Side throw - 145x45° | [350]<br>5 W                   | [740]<br>4000 K CRI 70   | [ONOFF]<br>On/Off | [HM1]<br>Black  |
|  | [700]<br>10 W                  | [822]<br>2200 K CRI 80<br><br>[827]<br>2700 K CRI 80<br><br>[830]<br>3000 K CRI 80<br><br>[840]<br>4000 K CRI 80 | [DALI]<br>DALI    | [HM2]<br>Dark grey<br><br>[HM3]<br>Anthracite grey<br><br>[HM4]<br>Light grey<br><br>[HM5]<br>White<br><br>[HM6]<br>Bronze<br><br>[CC]<br>Custom colour (Please specify RAL code) |
| Height   | Extras                         | Accessories ( <i>To be ordered separately</i> )  |                   |   |
| [H0.80]<br>80cm<br><br>[HC]                    | Consult the factory            | Anchorage  |                   |   |
|  | [EK]<br>Emergency kit          | [628I000]<br>628I000   |                   |   |
|  | [MS]<br>Motion sensor          |  |                   |   |
|  | [UNI]<br>120-277V 50/60Hz      |  |                   |   |
|  | Luminaire body options         |  |                   |   |
|  | [DPC]<br>Double powder coating |  |                   |   |