

# **MOLTO 2 Hybrid**

## LR9012.690-EN-N-700-740-SS





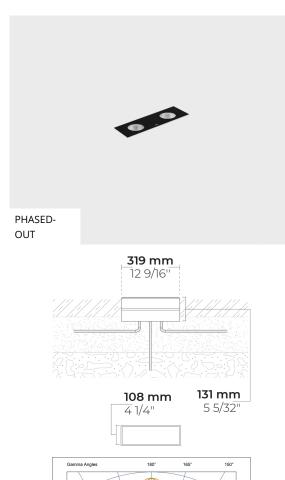



[N] Narrow - NEMA Type 2

## Configuration

Light distribution	[N] 26°
Delivered lumens flux	2038 lm
Rated input power	18 W
Color temperature	4000 K CRI 70
Luminaire efficacy	101 lm/W
Lamp	2 LED
Color Deviation	5 SDCM
Lifetime L90 (hour)	>72,600
Lifetime L80 (hour)	>72,600

#### Options

## Technical information

Mounting	Ground recessed mountable
Housing	Corrosion resistant stainless steel housing (AISI
	316L / EN 1.4571 grade)
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Silicone
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP67
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	2.66 kg
LED module	Multi-chip high power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge	1/1 kV
protection	
Power factor	> 0.90
Through wiring	Single power cord entry
Operating	-3050°C
temperature	
Power cord	12" of rubber-sheated power cord

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 21.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (Included)

# Accessories (To be ordered separately)

#### Mounting accessories



Aluminium case for ZETA 4 Dyno / MOLTO 2 Hybrid

007500582

#### Mounting accessories Mounting accessories Mounting accessories





**Case removing** Connector set - 5vacuum pole 160404012 141407400

Junction Box 141901135

HEPER USA LLC W227 N546 Westmound Drive Waukesha, 53186 Wisconsin, United States +1 312 910 9740 infoUS@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 21.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project na	me			Туре	Quantity	
Date			Note			
LR9012.	690-EN-N	-700-740	SS			

Light distribution	Rated input power	Color temperature	Control	Product colors
<b>[N]</b> Narrow - NEMA Type	<b>[700]</b> 18 W	<b>[740]</b> 4000 K CRI 70	<b>[ONOFF]</b> On/Off	[ <b>SS</b> ] Stainless steel
2 - 26° <b>[S]</b> Spot - NEMA Type 0 - 7°		<b>[827]</b> 2700 K CRI 80	<b>[DALI]</b> DALI	
		<b>[830]</b> 3000 K CRI 80		
		<b>[840]</b> 4000 K CRI 80		
Accessories	Accessories ( <i>To be</i>			
(Included)	ordered separately)	_		
Mounting accessories	Mounting accessories			
<b>[007500582]</b> Aluminium case for ZETA 4 Dyno / MOLTO 2 Hybrid	<b>[160404012]</b> Case removing vacuum			
	<b>[141407400]</b> Connector set - 5-pole			
	<b>[141901135]</b> Junction Box			