
## Conical aluminum pole with CE 믿놈 embedded base - Ø114 mm diameter



PABK.D114-S60-H5



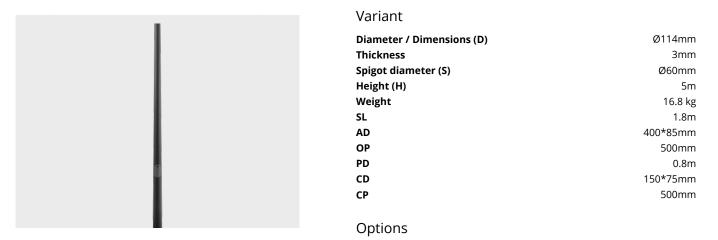

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

## HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 03.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

PTCD

Mounting arms	Mounting arms		
I P			
Mounting arm - 1 side	Mounting arm - 2 sides		

PTCS

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

## HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 03.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project name			Туре	Quantity	
Date	Note				
PABK.D114-S60-H5					
Spigot diameter (S)	Height (H)	Product colours	Extras	Accessories	
[\$60]	[H5]	[HM1] Black [HM2]	LED Caps	To be ordered separately	
Ø60mm	5m		<b>[LC1]</b> LED caps for pole top (Circular)		
<b>[S76]</b> Ø76mm mm	[ <b>H3</b> ] 3m m			Mounting arms	
[H4] [HM3]   4m m Anthrac   [HM4] [HM4]	Anthracite grey	[LC2] [PTCS] Mounting arm - 1 side			
	Light grey				
	[HM5]				
		[HM6] Bronze			
		[CC] (Please specify RAL code)			

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com HEPER Europe GmbH Ahornweg 5a, 58675 Hemer, Germany

infoEU@hepergroup.com

+49 237 2901 2975

We reserve the right to change specifications without prior written notice. Edition: 03.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

3/3