
Conical aluminum pole with CE 믿놈 embedded base - Ø122 mm diameter



PABK.D122-S76-H7



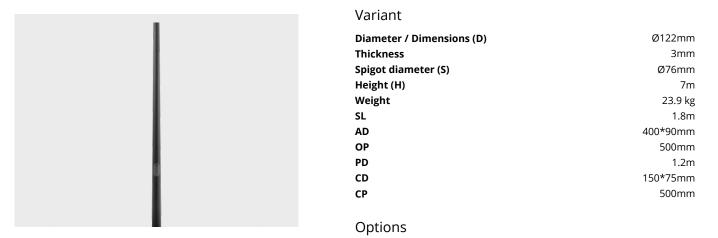

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 05.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

PTCS

Mounting arms	Mounting arms	
Mounting arm - 2 sides	Mounting arm - 1 side	

PTCD

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 05.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project name			Туре	Quantity	
Date	Note				
PABK.D122-S76-H7					
Spigot diameter (S)	Height (H)	Product colours	Extras	Accessories	
[\$76]	[H7]	[HM1] Black [HM2]	LED Caps	To be ordered	
Ø76mm	7m		[LC1] LED caps for pole top (Circular)	separately	
[S60] Ø60mm mm	[H4] 4m m			Mounting arms	
[H5] 5m m [HM3]	[HM3] Anthracite grey	[LC2] LED caps for pole top (Triangle)	[PTCD] Mounting arm - 2 sides [PTCS] Mounting arm - 1 side		
	Research Control of Co	Spigot converter			
	[HM5]	[SC1] Ø76 mm to Ø60 mm			
		[HM6] Bronze			
		[CC] (Please specify RAL code)			

HEPER Europe GmbH Ahornweg 5a, 58675 Hemer, Germany

+49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 05.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 $\,$ tolerance) are derived following appropriate IES, CIE, and applicable standards.