




# HANDRA Forward - Ø60 mm



IK10 IP65



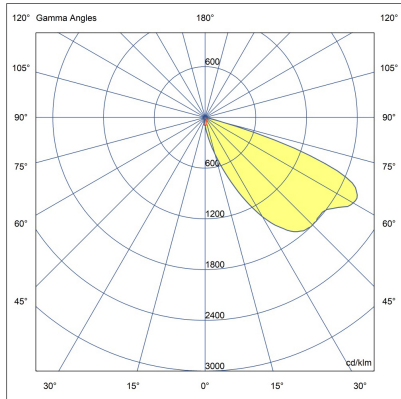LH5006.595-EN-SLFH-350-740-CC-3V-350-C3

22 mm  
55/64"40 mm  
1 37/64"**[SLFH]**Special linear,  
Forward throw

## Variant

Light distribution	[SLFH] 44x46°
Delivered lumens flux	100 lm
Rated input power	1 W
Colour temperature	4000 K CRI 70
Luminaire efficacy	100 lm/W
Lamp	1 LED
MacAdam Ellipse	4 SDCM
Lifetime L90B50 (hour)	>102,000
Lifetime L80B50 (hour)	>102,000

## Options

## Technical information

Housing	Corrosion resistant, die-cast, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid gasket
Lens / Reflector	High reflectance aluminium coating
Glass / Diffusor	Custom Design PMMA Diffusor
Impact protection	IK10
Ingress protection	IP65
Input voltage	3 Vdc (Max) 350 mA
Insulation class	Class III
Weight	0.05 kg
LED module	High power LEDs on metal-core PCB
Driver	External LED driver
Through wiring	Single cable entry
Operating temperature	-25...50°C
Cable	0.2 m of flexible cable
Packing box dimensions	7*7*7 cm

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 01.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---


Mounting accessories



**DALI & On/Off  
driver within an  
IP67 box for 1 to 6  
HANDRA modules**

007502063


Mounting accessories



**DALI & On/Off  
driver within an  
IP67 box for 7 to  
15 HANDRA  
modules**

007502064

Mounting accessories



**DALI & On/Off  
driver within an  
IP67 box for 16 to  
35 HANDRA  
modules**

007502065

Project name		Type		Quantity	
Date		Note			
LH5006.595-EN-SLFH-350-740-__-CC-3V-350-C3-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLFH] Special linear, Forward throw - 44x46°	[350] 1 W	[740] 4000 K CRI 70	[ONOFF] On/Off	[HM1] Black
		[827] 2700 K CRI 80	[DALI] DALI	[HM2] Dark grey
		[830] 3000 K CRI 80		[HM3] Anthracite grey
		[840] 4000 K CRI 80		[HM4] Light grey
				[HM5] White
				[HM6] Bronze
				[CC] Custom colour (Please specify RAL code)
Accessories ( <i>To be ordered separately</i> )				
Mounting accessories				
[007502063] DALI & On/Off driver within an IP67 box for 1 to 6 HANDRA modules				
[007502064] DALI & On/Off driver within an IP67 box for 7 to 15 HANDRA modules				
[007502065] DALI & On/Off driver within an IP67 box for 16 to 35 HANDRA modules				