Conical aluminum pole with CE CA embedded base - Ø180 mm diameter



4mm


9m

53.4 kg

1.8m

1.5m

PABK.D180-S90-H9

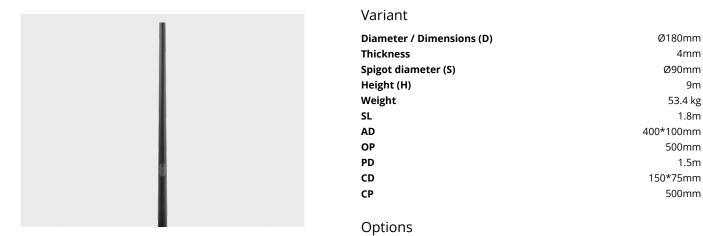



HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 30.04.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

PTCS

Mounting arms	Mounting arms
Mounting arm - 2 sides	Mounting arm - 1 side

PTCD

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 30.04.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name			Туре	Quantity
Date	Note		· · ·	· · ·
PABK.D180-S90	-H9			
Spigot diameter (S)	Height (H)	Product colours	Accessories	
[S90] Ø90mm	[H9] 9m	[HM1] Black	To be ordered separately	
[\$76]	[H10]	[HM2]	Mounting arms	
Ø76mm mm	10m m	Dark grey	[PTCD]	
	[H8] 8m m	[HM3] Anthracite grey	Mounting arm - 2 sides	
		[HM4] Light grey	[PTCS] Mounting arm - 1 side	2
		[HM5] White		
		[HM6] Bronze		
		[CC] (Please specify RAL code)		

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com HEPER Europe GmbH Ahornweg 5a, 58675 Hemer, Germany

infoEU@hepergroup.com

+49 237 2901 2975

We reserve the right to change specifications without prior written notice. Edition: 30.04.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

3/3