
Conical aluminum pole with CE 믿놈 embedded base - Ø200 mm diameter



PABK.D200-S76-H12



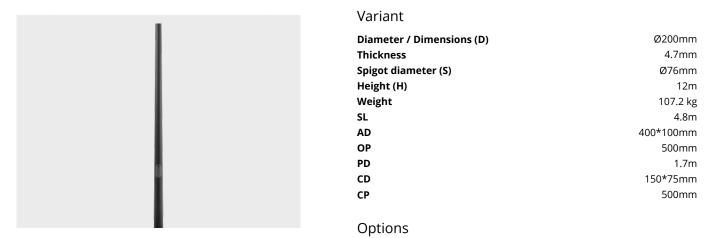

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 06.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

PTCD

Mounting arms	Mounting arms		
I P			
Mounting arm - 1 side	Mounting arm - 2 sides		

PTCS

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 06.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

2/3

Project name			Туре	Quantity	
Date	Note				
PABK.D200-S76-H12					
Spigot diameter (S)	Height (H)	Product colours	Extras	Accessories	
[\$76]	[H12]	[HM1] Black [HM2]	LED Caps	To be ordered separately	
Ø76mm	12m		[LC1] LED caps for pole top (Circular)		
[S90] Ø90mm mm	[H10] 10m m			Mounting arms	
[H11] 11m m [L	Dark grey [HM3] Anthracite grey	[LC2][PTCS]LED caps for pole top (Triangle)[PTCD] Mounting arm - 2			
	[HM4] Light grey	Spigot converter	sides		
	[HM5] White	[SC3] Ø60 mm to Ø50 mm			
		[HM6] Bronze			
	[CC] (Clastom colour (Please specify RAL code)				

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com HEPER Europe GmbH Ahornweg 5a, 58675

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 06.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

3/3