
Conical aluminum pole with CE 믿놈 embedded base - Ø148 mm diameter



PABK.D148-S76-H8



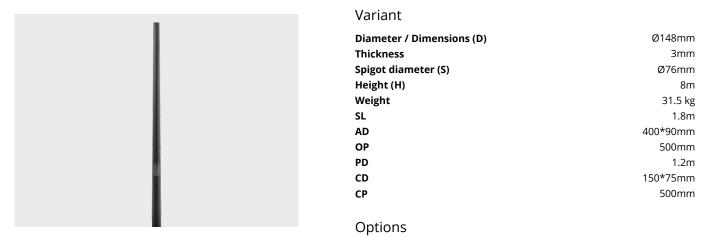

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 02.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Accessories (To be ordered separately)

PTCS

Mounting arms	Mounting arms	
Mounting arm - 2 sides	Mounting arm - 1 side	

PTCD

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH

Ahornweg 5a, 58675 Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 02.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

Project name			Туре	Quantity	
Date	Note		· ·		
PABK.D148-S76-H8					
Spigot diameter (S)	Height (H)	Product colours	Extras	Accessories	
[\$76]	[H8]	[HM1] Black [HM2]	LED Caps	To be ordered separately	
Ø76mm	8m		[LC1] LED caps for pole top (Circular)		
[S60] Ø60mm mm	[H6] 6m m			Mounting arms	
	-	Dark grey		[PTCD]	
Anth [HM4 Light Whit [HM4 Bron [CC] Custo	[HM3] Anthracite grey [LC2] LED caps for pole t (Triangle)	LED caps for pole top			
	[HM4] Light grey	Spigot converter [PTCS] [SC1] Ø76 mm to Ø60 mm			
	[HM5] White				
	[HM6] Bronze				
	[CC] (Please specify RAL code)				

HPR Pazarlama A.Ş. Başkent OSB 22. Cd. No: 2, Malıköy, Temelli, Sincan, 06909 Ankara, Turkey +90 312 267 54 30 info@hepergroup.com

HEPER Europe GmbH Ahornweg 5a, 58675

Hemer, Germany +49 237 2901 2975 infoEU@hepergroup.com We reserve the right to change specifications without prior written notice. Edition: 02.05.2024. For current version visit heperlighting.com. All flux (±%7 tolerance) and power values (±%10 $\,$ tolerance) are derived following appropriate IES, CIE, and applicable standards.

3/3