



# DRAGO Forward



IK08 IP65



LB6048.575-EN-SLFB-350-830-EN-C1

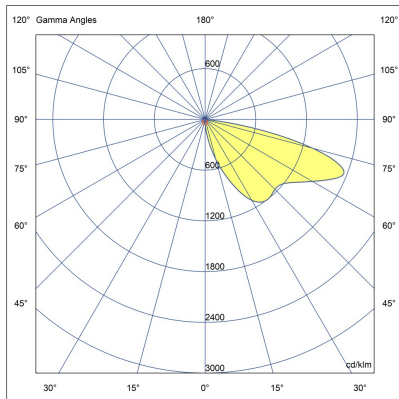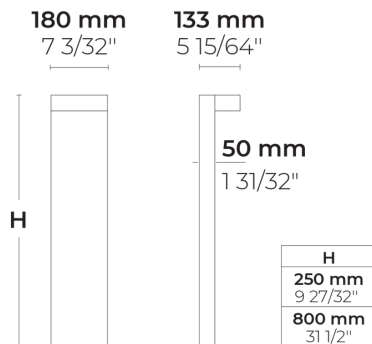

[SLFB]

Special linear,  
Forward throw

## Variant

Light distribution	[SLFB] 65x70°
Delivered lumens flux	924 lm
Rated input power	10 W
Colour temperature	3000 K CRI 80
Luminaire efficacy	92 lm/W
Lamp	4 LED
MacAdam Ellipse	3 SDCM
BUG rating	B1-U0-G1
Lifetime L90B50 (hour)	>42,000
Lifetime L80B50 (hour)	>42,000

## Options

## Technical information

Mounting	Surface mountable
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	3.53 kg (0.25 m), 4.5 kg (0.8 m)
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable
Packing box dimensions	15*20*30 cm (0.25 m), 15*20*85 cm (0.8 m)


HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com

HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 06.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±7% tolerance) and power values (±10% tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

### Anchorage



628I000

628I000

Project name		Type		Quantity	
Date		Note			
LB6048.575-EN-SLFB-350-830-__-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
<b>[SLFB]</b> Special linear, Forward throw - 65x70°	<b>[350]</b> 10 W	<b>[830]</b> 3000 K CRI 80	<b>[ONOFF]</b> On/Off  <b>[DALI]</b> DALI	<b>[HM1]</b> Black
	<b>[700]</b> 20 W	<b>[822]</b> 2200 K CRI 80  <b>[827]</b> 2700 K CRI 80  <b>[740]</b> 4000 K CRI 70  <b>[840]</b> 4000 K CRI 80		<b>[HM2]</b> Dark grey  <b>[HM3]</b> Anthracite grey  <b>[HM4]</b> Light grey  <b>[HM5]</b> White  <b>[HM6]</b> Bronze  <b>[CC]</b> Custom colour (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
<b>[H0.25]</b> 25cm  <b>[H0.80]</b> 80cm  <b>[HC]</b>	Consult the factory	Anchorage		
	<b>[EK]</b> Emergency kit	<b>[628I000]</b> 628I000		
	<b>[MS]</b> Motion sensor			
	<b>[UNI]</b> 120-277V 50/60Hz			
	Luminaire body options			
<b>[DPC]</b> Double powder coating				