

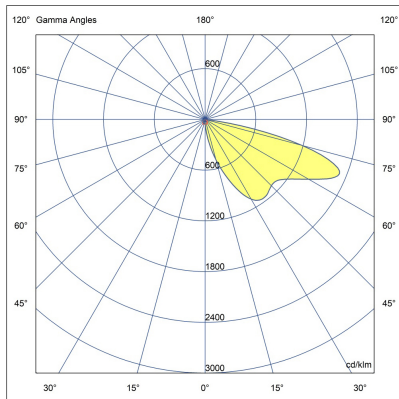
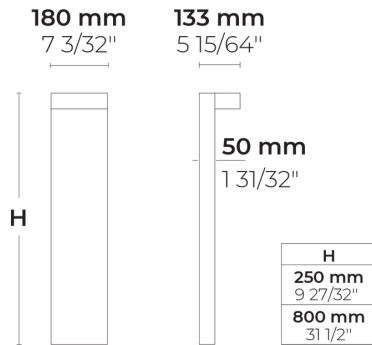
# DRAGO Forward



IK08 IP65



LB6048.575-EN-SLFB-700-822-EN-C1

**[SLFB]**Special linear,  
Forward throw

## Variant

|                               |               |
|-------------------------------|---------------|
| <b>Light distribution</b>     | [SLFB] 65x70° |
| <b>Delivered lumens flux</b>  | 1442 lm       |
| <b>Rated input power</b>      | 20 W          |
| <b>Colour temperature</b>     | 2200 K CRI 80 |
| <b>Luminaire efficacy</b>     | 72 lm/W       |
| <b>Lamp</b>                   | 4 LED         |
| <b>MacAdam Ellipse</b>        | 3 SDCM        |
| <b>BUG rating</b>             | B1-U0-G1      |
| <b>Lifetime L90B50 (hour)</b> | >42,000       |
| <b>Lifetime L80B50 (hour)</b> | >42,000       |

## Options

## Technical information

|                                |   |
|--------------------------------|---|
| <b>Mounting</b>                | Surface mountable   |
| <b>Housing</b>                 | Corrosion resistant, extruded, marine grade aluminum housing              |
| <b>Finishing</b>               | Chromate conversion pretreatment followed by electrostatic powder coating |
| <b>Fasteners</b>               | Stainless steel (AISI 304 / EN 1.4301 grade)                              |
| <b>Gasket</b>                  | Liquid silicone   |
| <b>Lens / Reflector</b>        | High reflectance aluminium coating, multifaceted micro reflector          |
| <b>Glass / Diffusor</b>        | Tempered safety glass   |
| <b>Impact protection</b>       | IK08  |
| <b>Ingress protection</b>      | IP65  |
| <b>Input voltage</b>           | 220-240V 50/60Hz  |
| <b>Insulation class</b>        | Class I   |
| <b>Weight</b>                  | 3.53 kg (0.25 m), 4.5 kg (0.8 m)  |
| <b>LED module</b>              | High power LEDs on metal-core PCB   |
| <b>Driver</b>                  | Internal LED driver   |
| <b>Driver surge protection</b> | 1/1 kV  |
| <b>Power factor</b>            | > 0.90  |
| <b>Through wiring</b>          | Single cable entry  |
| <b>Operating temperature</b>   | -40...50°C  |
| <b>Cable</b>                   | 0.5 m of flexible cable   |
| <b>Packing box dimensions</b>  | 15*20*30 cm (0.25 m), 15*20*85 cm (0.8 m)                                 |

**HPR Pazarlama A.Ş.**  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com


**HEPER Europe GmbH**  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 19.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---








### Anchorage



**628I000**

628I000

|   |  |      |  |          |  |
|---|--|------|--|----------|--|
| Project name                                    |  | Type |  | Quantity |  |
| Date  |  | Note |  |          |  |
| LB6048.575-EN-SLFB-700-822-__-EN-C1-__-__-__-__ |  |      |  |          |  |

| Light distribution                                     | Rated input power                 | Colour temperature                                  | Control           | Product colours  |
|--|-----------------------------------|---|-------------------|--|
| [SLFB]<br>Special linear,<br>Forward throw -<br>65x70° | [700]<br>20 W                     | [822]<br>2200 K CRI 80                              | [ONOFF]<br>On/Off | [HM1]<br>Black                                      |
|  | [350]<br>10 W                     | [827]<br>2700 K CRI 80                              | [DALI]<br>DALI    | [HM2]<br>Dark grey                                  |
|  |                                   | [830]<br>3000 K CRI 80                              |                   | [HM3]<br>Anthracite grey                            |
|  |                                   | [740]<br>4000 K CRI 70                              |                   | [HM4]<br>Light grey                                 |
|  |                                   | [840]<br>4000 K CRI 80                              |                   | [HM5]<br>White                                      |
|  |                                   |   |                   | [HM6]<br>Bronze                                     |
|  |                                   |   |                   | [CC] <br>Custom colour (Please<br>specify RAL code) |
| Height   | Extras                            | Accessories ( <i>To be<br/>ordered separately</i> ) |                   |  |
| [H0.25]<br>25cm<br><br>[H0.80]<br>80cm<br><br>[HC]     | Consult the factory               | Anchorage   |                   |  |
|  | [EK]<br>Emergency kit             | [628I000]<br>628I000                                |                   |  |
|  | [MS]<br>Motion sensor             |   |                   |  |
|  | [UNI]<br>120-277V 50/60Hz         |   |                   |  |
|  | Luminaire body<br>options         |   |                   |  |
|  | [DPC]<br>Double powder<br>coating |   |                   |  |