



# DRAGO Ex Forward

CE UK CA IK08 IP65

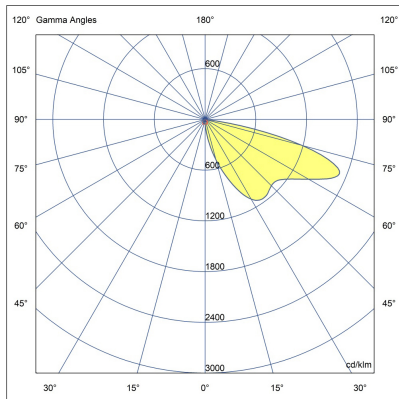

LB7035.575-EN-SLFB-350-822-EN-C1

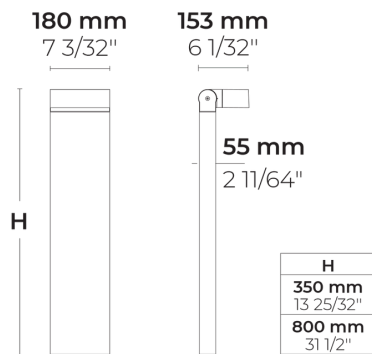

[SLFB]

Special linear,  
Forward throw

## Variant

Light distribution	[SLFB] 65x70°
Delivered lumens flux	721 lm
Rated input power	10 W
Colour temperature	2200 K CRI 80
Luminaire efficacy	72 lm/W
Lamp	4 LED
MacAdam Ellipse	3 SDCM
BUG rating	B0-U0-G0
Lifetime L90B50 (hour)	>42,000
Lifetime L80B50 (hour)	>42,000

## Options

## Technical information

Mounting	Surface mountable
Tilt angle	+135°/0°
Housing	Corrosion resistant, extruded, marine grade aluminum housing
Finishing	Chromate conversion pretreatment followed by electrostatic powder coating
Fasteners	Stainless steel (AISI 304 / EN 1.4301 grade)
Gasket	Liquid silicone
Lens / Reflector	High reflectance aluminium coating, multifaceted micro reflector
Glass / Diffusor	Tempered safety glass
Impact protection	IK08
Ingress protection	IP65
Input voltage	220-240V 50/60Hz
Insulation class	Class I
Weight	4.50 kg (0.35 m), 6.0 kg (0.8 m)
LED module	High power LEDs on metal-core PCB
Driver	Internal LED driver
Driver surge protection	1/1 kV
Power factor	> 0.90
Through wiring	Single cable entry
Operating temperature	-40...50°C
Cable	0.5 m of flexible cable
Notes	QUICK SHIP: Some variants will be delivered faster. Please consult the factory.

HPR Pazarlama A.Ş.  
Başkent OSB 22. Cd. No: 2, Malıköy, Temelli,  
Sincan, 06909 Ankara, Turkey  
+90 312 267 54 30  
info@hepergroup.com


HEPER Europe GmbH  
Ahornweg 5a, 58675  
Hemer, Germany  
+49 237 2901 2975  
infoEU@hepergroup.com

We reserve the right to change specifications without prior written notice. Edition: 03.05.2024.  
For current version visit [heperlighting.com](http://heperlighting.com). All flux (±%7 tolerance) and power values (±%10 tolerance) are derived following appropriate IES, CIE, and applicable standards.

## Accessories (To be ordered separately)

---

### Anchorage



**628I000**

628I000

Project name		Type		Quantity	
Date		Note			
LB7035.575-EN-SLFB-350-822-__-EN-C1-__-__-__-__					

Light distribution	Rated input power	Colour temperature	Control	Product colours
[SLFB] Special linear, Forward throw - 65x70°	[350] 10 W	[822] 2200 K CRI 80	[ONOFF] On/Off  [DALI] DALI	[HM1] Black
	[700] 20 W	[827] 2700 K CRI 80  [830] 3000 K CRI 80  [740] 4000 K CRI 70  [840] 4000 K CRI 80		[HM2] Dark grey  [HM3] Anthracite grey  [HM4] Light grey  [HM5] White  [HM6] Bronze  [CC] Custom colour (Please specify RAL code)
Height	Extras	Accessories ( <i>To be ordered separately</i> )		
[H0.80] 80cm  [HC]	Consult the factory	Anchorage		
	[EK] Emergency kit	[628I000] 628I000		
	[MS] Motion sensor			
	[UNI] 120-277V 50/60Hz			
	Luminaire body options			
	[DPC] Double powder coating			